

26 November 2009

Drilling Update

Current activity

- **Tilbrook #9** has been drilled to 500 m, logged and under-reamed across target coal seams ready to be cased and suspended as a future producer.
- **Tilbrook #10b** the rig is moving to site.
- **The TXD Rig** drilling rate is exceeding expectations.
- **The T8 lateral producing well** continues to produce gas from one lateral (TL8a) after several attempts to clear the blockage in (TL8b) and water rates remain encouraging.

Up to 16 wells are planned as part of the 2009 / 2010 exploration program across WestSide's tenements.

ATP 688P coal seam gas drilling program (Tilbrook)

WestSide continues a multi well program in ATP 688P in the northern Bowen Basin to confirm coal and gas in the P seam and Goonyella seams of the Moranbah Coal Measures in preparation for the drilling of two sets of horizontal chevron-style dual-lateral wells (Tilbrook #L9a and #L9b, Tilbrook #L10a and #L10b) which are planned to intersect with new vertical wells (Tilbrook #9 and #10).

Tilbrook #9 is planned as a vertical appraisal well which will be intersected by two horizontal appraisal wells (Tilbrook #L9a and #L9b).

Latest activity – Tilbrook #9

The Tilbrook #9 vertical appraisal well spud on 20 November and has been drilled to a depth of 500 m, logged and under-reamed across selected coal seams. Production casing is currently being run. The well will be suspended as a future producer. The well encountered 10 metres of net coal, including 4 metres in the target P seam.

Summary : ATP 688P coal seam gas drilling program (Oct – Dec)

Well	Well Type	Spud Date	Finish Date	Current Status
Tilbrook # 9a	Exploration	16 Oct 2009	5 Nov 2009	Suspended as future producer.
Tilbrook # 9 vertical	Appraisal	20 Nov 2009	27 Nov 2009 (Planned)	Drilled to 500m, logged and selected seams under-reamed. Casing currently being set.
Tilbrook # 10b	Exploration	29 Nov 2009 (Planned)	4 Dec 2009 (Planned)	Site ready.
Tilbrook # 10a	Exploration	6 Dec 2009 (Planned)	12 Dec 2009 (Planned)	Site ready.

Boart Longyear is the drilling contractor.

Expected operations in the next week

Casing to be set above the target coal seams in the Tilbrook #9 well and the well to be suspended as a future producer.

The rig will move to the Tilbrook #10b site and commence drilling early next week.

Other Activities

The Tilbrook 8 lateral well is blocked in one lateral (TL8b). The Tilbrook 8 lateral well continues to produce gas from one lateral (TL8a). After several attempts to clear the blockage in TL8b without success, the well is coming back on line and water rates remain encouraging.

About WestSide Corporation Ltd

WestSide Corporation Limited is listed on ASX (ASX code: WCL) and has interests in coal seam gas (CSG) projects in Queensland and Indonesia. WestSide has a 50% interest in ATP 688P and ATP 769P with QGC holding the other 50%.

WestSide is currently operating an appraisal program in ATP 769P (Paranui) and ATP 688P (Tilbrook, Mount Saint Martin and Bald Hill) sites in Queensland's Bowen Basin, and is also assessing the CSG potential of certain coal deposits in Indonesia through its relationship with PT Bumi Resources TBK, one of Indonesia's largest coal miners.

Regular updates will be provided during the course of the drilling campaign.

Additional information is available on WestSide's website: www.westsidecorporation.com.

For further information contact:


WestSide Corporation Ltd

Angus Karoll
Chairman and Acting CEO
07 3020 0900

Media

Anna O'Gorman
Principal Consultant - Three Plus
07 3503 5700
0423 463 548

Tilbrook CSG Pilot Area

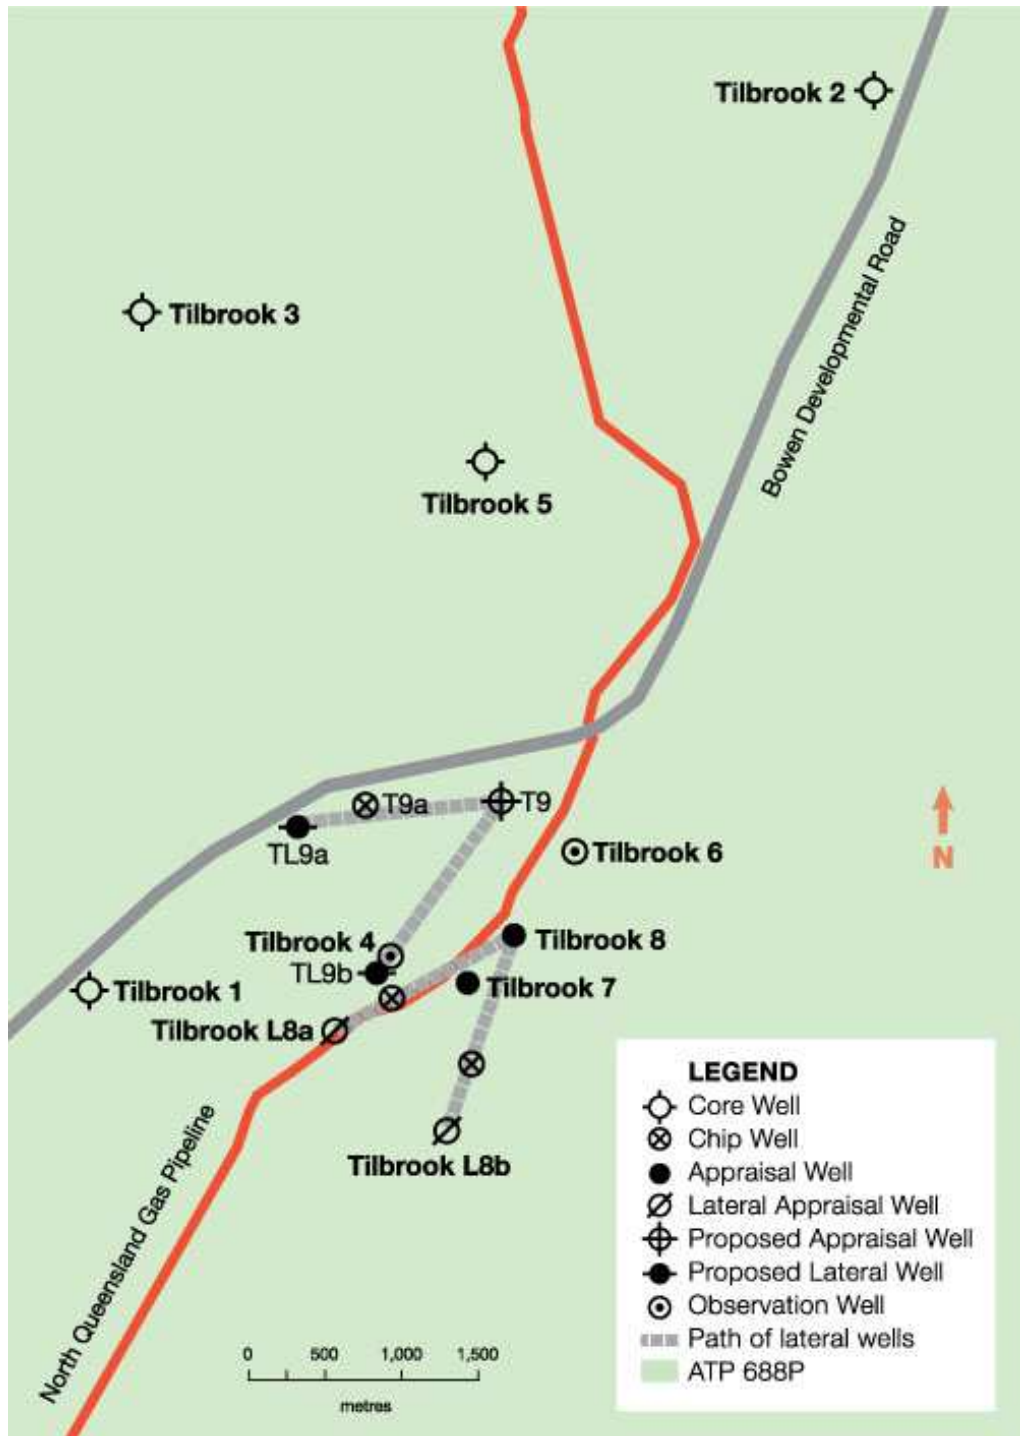

ATP 769P Area of Operations (Paranui)

