

ASX ANNOUNCEMENT AND MEDIA RELEASE

7 April 2016

ADDITIONAL NEAR SURFACE GOLD MINERALISATION AT NAMDINI

HIGHLIGHTS

- **Near surface gold intersection:**
 - **47.5m @ 1.30 g/t from 20m vertical depth**
- **Other gold intersections include:**
 - **3.0m @ 9.68 g/t**
 - **5.5m @ 2.51 g/t**

Cardinal Resources Limited (ASX: CDV) ("**Cardinal**" or "**the Company**") announces the results of a further two diamond drill holes, NMRD479-779 and NMRD500-788, recently completed on the Namdini Project ("**Namdini**") (Figure 1).

Drill Hole **NMRD479-779** intersected 135m of variably altered volcanoclastics and granitoids from 2m to 137m vertical depth, with mineralised zones developed to 137m vertical depth. Near surface mineralisation of 47.5m @ 1.30 g/t occurs from 20m vertical depth. Other mineralised zones include 3m @ 9.86 g/t, 5.5m @ 1.16 g/t (Figure 2).

The section comprised of drill holes NMDD481-759 and NMRD479-779 contains a wide gold mineralised zone of ~180m (Figure 2).

Drill Hole **NMRD500-788** intersected 91m of variably altered volcanoclastics and granitoids from 13m to 104m vertical depth, with mineralised zones developed to 94m vertical depth, including 8.8m @ 1.49 g/t and 5.5m @ 2.51 g/t (Figure 4).

The section comprised of drill holes NMDD502-768 and NMRD500-788 contains a wide gold mineralised zone of ~145m (Figure 4).

The mineralised zones intersected in these sections confirms the continuation of extensive gold mineralisation over approximately 900m along strike within the Namdini Project.

Cardinal is currently drilling hole NMDD378-758. On completion of the current drill hole, the next drill hole will be located 100m north along strike at NMDD405-756 (Figure 1).

Cardinal Resources Limited ABN 56 147 325 620

www.cardinalresources.com.au

Ghana: Durugu Residential Area, Kumbosco, Bolgatanga, Ghana P: +233 (0) 261905220 SKYPE: cardinal.archie

Australia: Level 1, 115 Cambridge Street, West Leederville, Perth, 6007 P: +61 (8) 9322 6600 F: +61 (8) 9322 6610

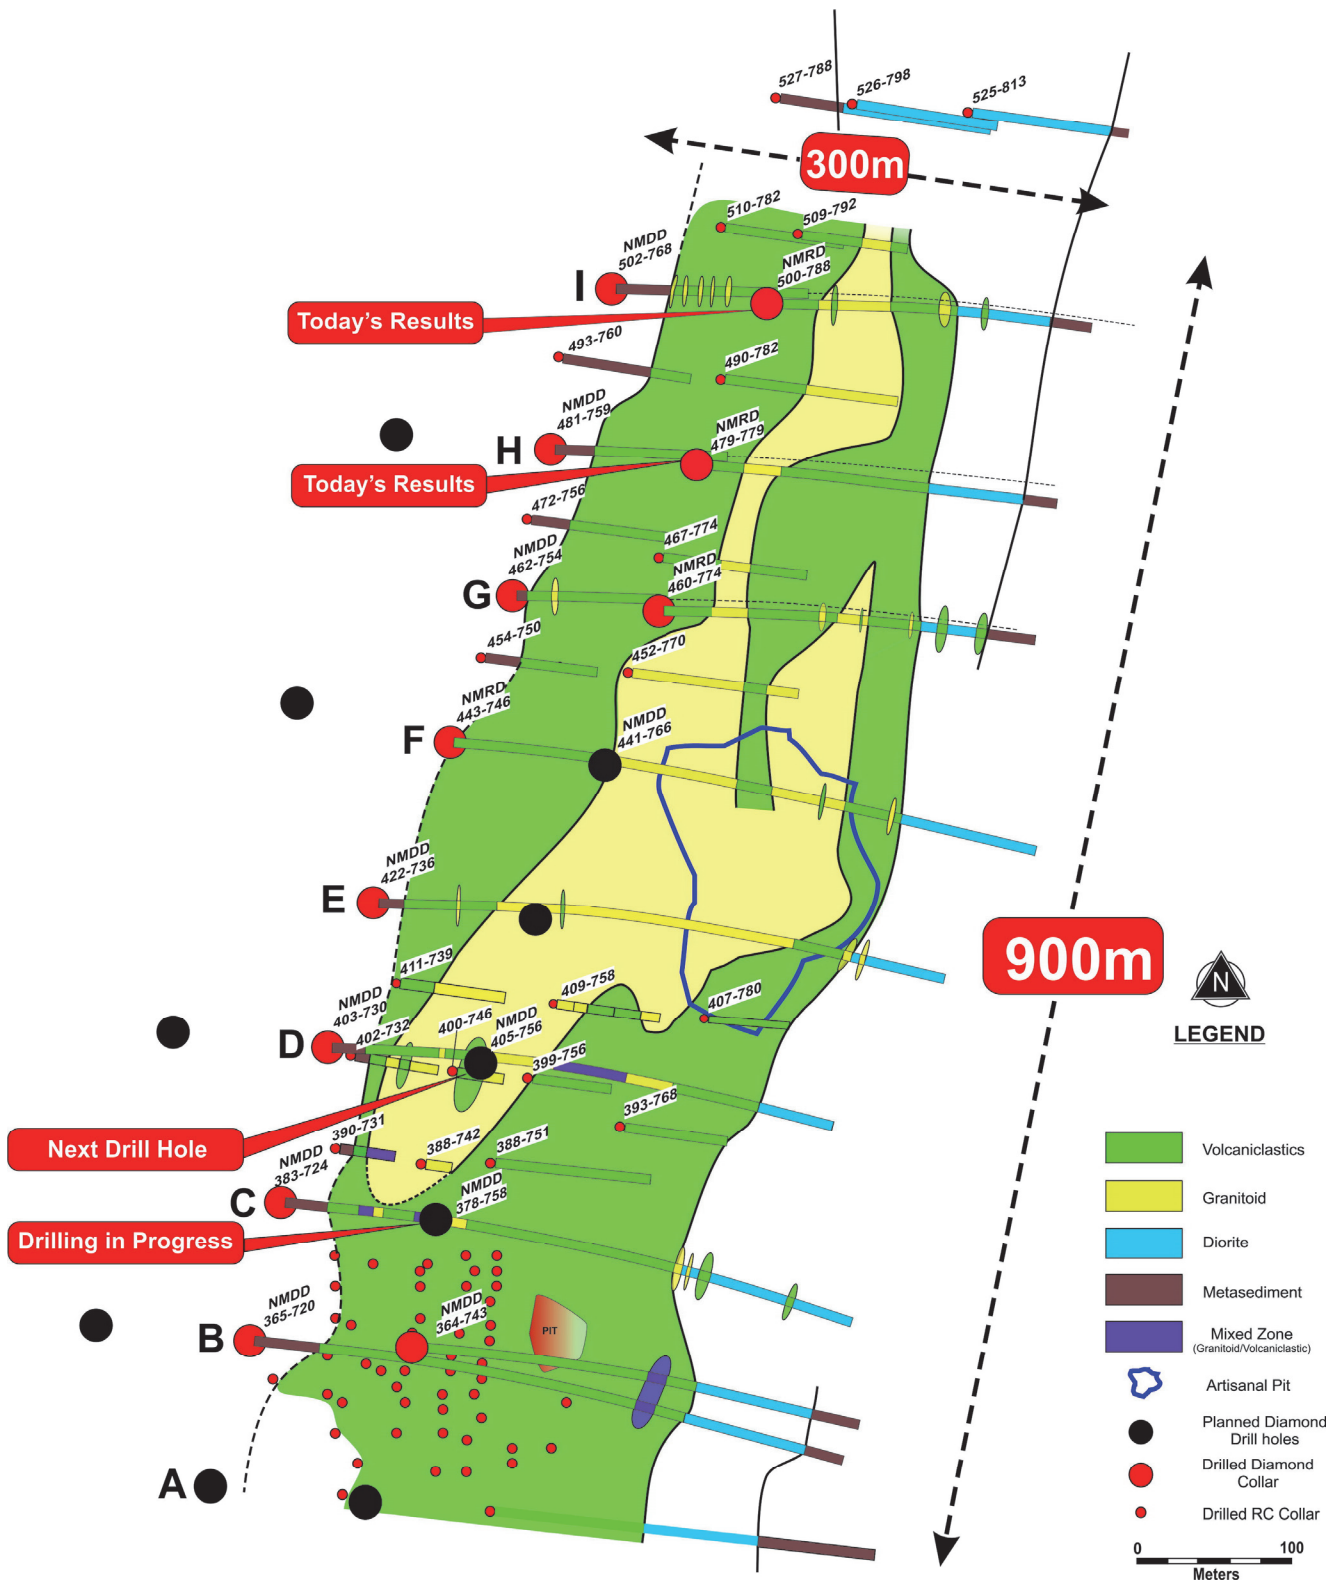


Figure 1: Location of Diamond Drill Holes NMRD479-779 and NMRD500-788

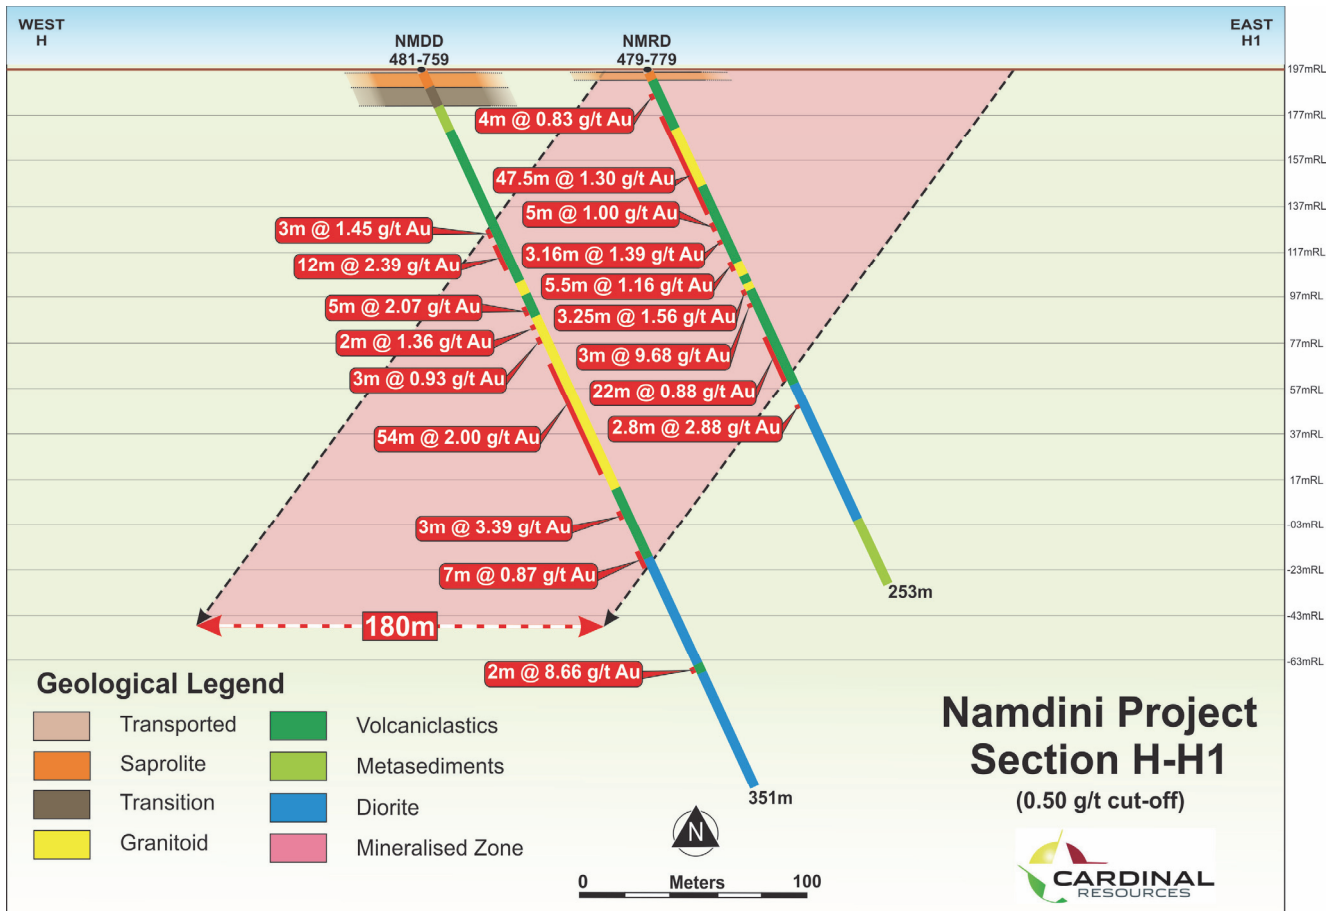


Figure 2: Diamond Drill Holes NMDD481-759 and NMRD479-779 with mineralised zone of 180m

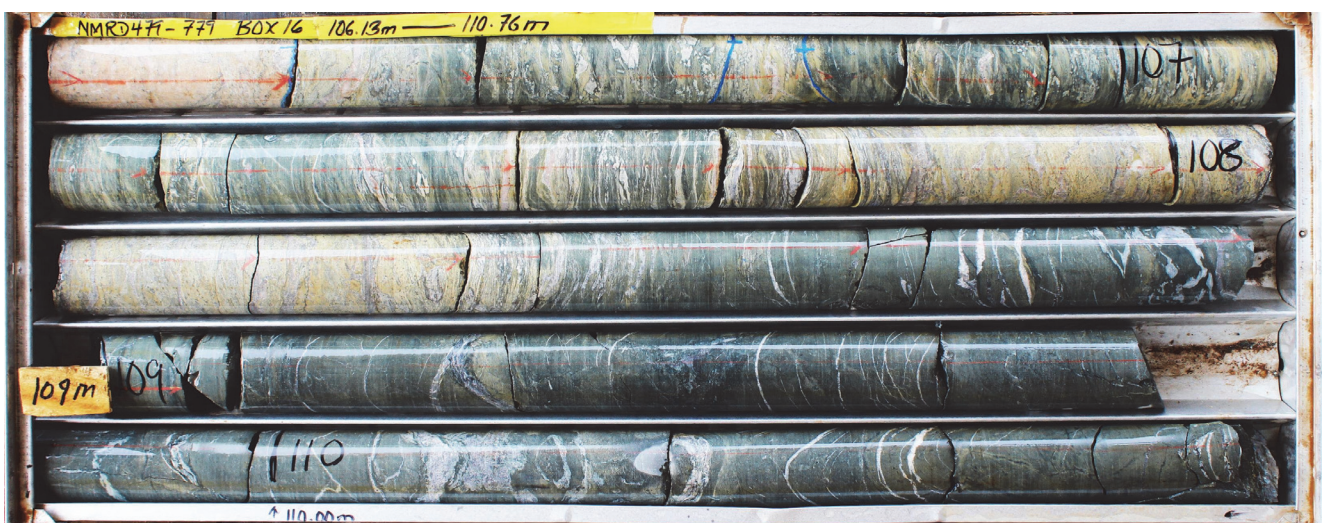


Figure 3a: Hydrothermally altered volcaniclastics (NMRD479-779)

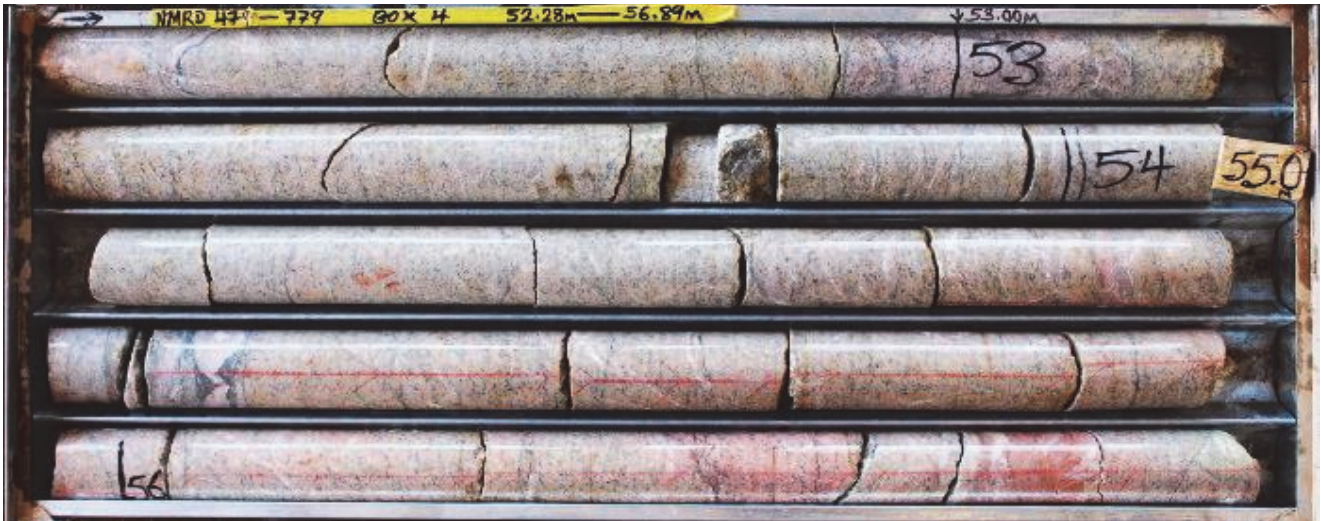


Figure 3b: Hydrothermally altered granitoids (NMRD479-779)

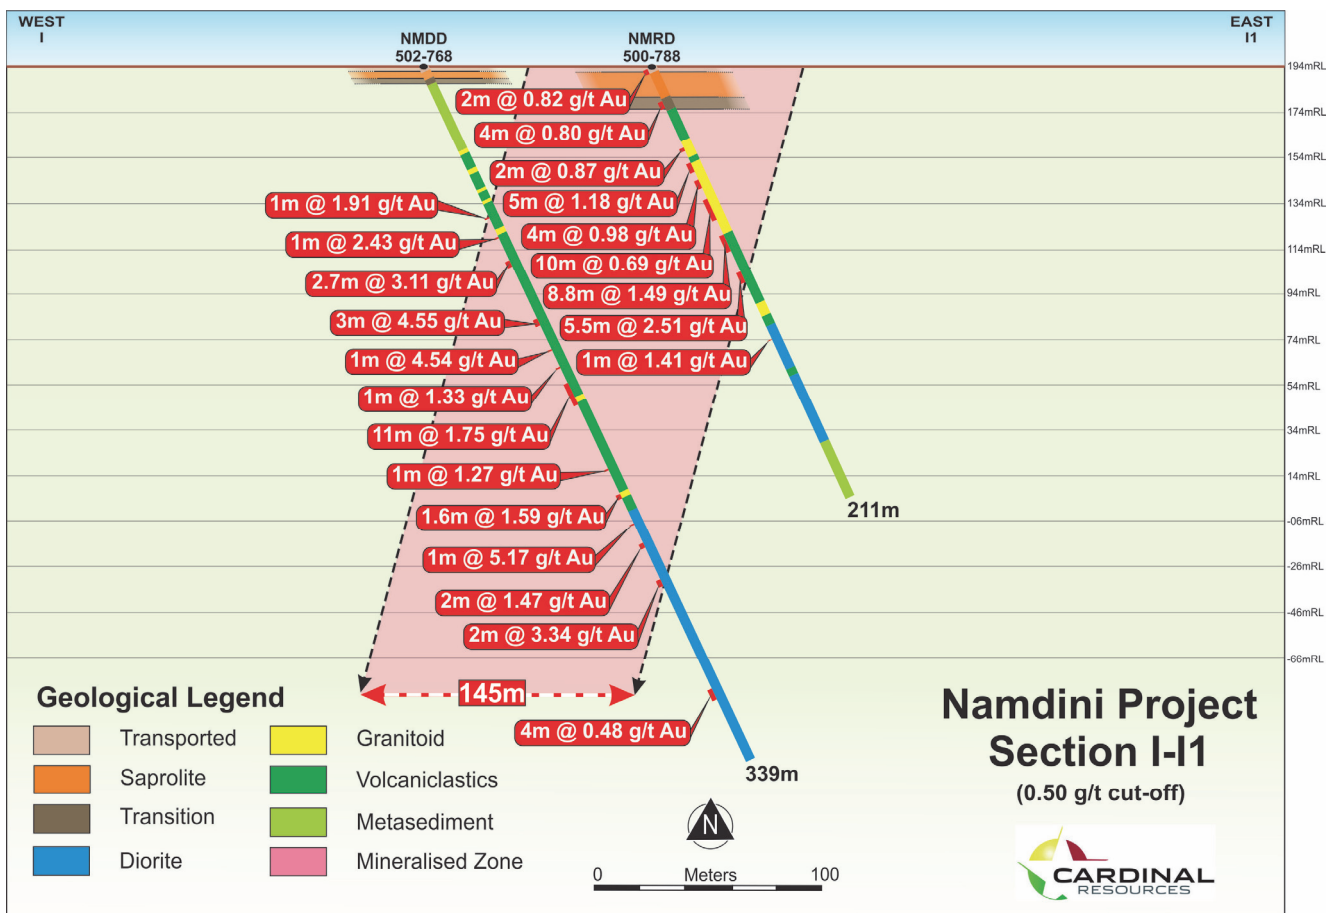


Figure 4: Diamond Drill Holes NMDD502-768 and NMRD500-788 with mineralised zone of 145m



Figure 5 : Hydrothermally altered volcaniclastics (NMRD500-788)

Drill holes NMRD479-779 and NMRD500-788 were drilled from surface to 39m and 66m depths respectively by Reverse Circulation (RC) methods. The drill rigs were aligned at -65° dip drilling east which allows for the shallowing of the drill holes with depth. The azimuth was set at 095° instead of 100° (normal to the strike of the formations) as the borehole traces usually deflects to the right with depth due to the clockwise rotation of the drill rods. The RC portion of each drill hole was surveyed at the bottom of the drill holes, with only the dip determined. The azimuth could not be measured due to the metal rods in the drill hole.

After RC drilling was complete, HW steel casing was inserted in each drill hole for stability and HQ size core was drilled to their final depths of 253m and 211m respectively. The drill holes were surveyed at the end of the RC drilling, then every 30m down the hole to determine the dip and azimuth of the drill holes with depth.

The core of both diamond drill holes was orientated at each drill run using a digital instrument. The core was marked showing the base of the drill hole, then the core from each drill run was laid in a length of angle iron to fit the core together so that the orientation line could be drawn along the length of the core at the drill site. Geotechnical parameters were measured using this orientation line as the datum line.

The core was photographed both wet and dry, then cut in half; one half was consistently sampled, with the remaining half stored in core trays and placed on racks under cover in Cardinal's secure core shed located at Bolgatanga, Ghana. The half core samples were sent to the SGS Laboratory in Burkina Faso for fire assay.

Planned Diamond Drilling Program

Further diamond drill holes are planned to evaluate the NNE trending gold mineralised corridor (marked in black circles on Figure 1). All of these drill holes are planned to drill across this mineralised corridor to confirm the continuation of gold mineralisation along strike and at depth.

Namdini Geology

The Namdini Project is located within a Paleo-Proterozoic Greenstone Belt comprising Birimian metavolcanics, volcaniclastics and metasediments located in close proximity to a major 30 km ~N-S regional shear zone with splays. These rock units are intruded by felsic monzonite granitoids and quartz diorites.

The gold mineralisation is developed within foliated, sheared and highly altered volcaniclastic rocks containing sulphides (pyrite and arsenopyrite). The host rocks dip approximately 60° W and strike 010° .

Cardinal Resources Limited ABN 56 147 325 620

www.cardinalresources.com.au

Ghana: Durugu Residential Area, Kumbosco, Bolgatanga, Ghana P: +233 (0) 261905220 SKYPE: cardinal.archie

Australia: Level 1, 115 Cambridge Street, West Leederville, Perth, 6007 P: +61 (8) 9322 6600 F: +61 (8) 9322 6610

Hydrothermal alteration of the volcanoclastics is comprised of silica, iron carbonate (ankerite), sericite, epidote and chlorite. The highly altered rocks contain disseminated gold-bearing sulphides and are distinguished from the grey, unaltered, unmineralised host rocks by characteristic pale to medium green colours.

The monzonite granitoids are medium to coarse grained with quartz vein stockworks and are usually altered to pale green epidote with patches of pink to reddish albite (alkali feldspar). Sulphides of pyrite and arsenopyrite are contained within these granitoids.

The monzonite granitoid intrusive is considered to have been the “heat engine” which remobilised gold bearing sulphide rich fluids which altered the host rocks and precipitated the gold mineralisation within them.

The NNE-SSW trending corridor containing the gold mineralisation is bounded on both east and west sides by foliated metasediments of varying compositions, also dipping 60°W and striking 010°.

The quartz diorites contain primary pyrite sulphides which are weakly mineralised when unaltered. However, the diorites become partly mineralised when they are hydrothermally altered or sheared with quartz veining, or when some mineralised zones of altered volcanoclastics or granitoids occur within them.

Monitoring Of Drilling Programs

Cardinal’s technical and management team evaluates all of the available data on a daily basis with the main focus being the expansion of the gold potential for the expanded licence areas.

Cardinal is the owner and operator of its own drill rig and has established an express assaying service with its drilling results, enabling the Company to continuously improve its drill plan strategy as new information becomes available.

The Company will continue drilling selective holes, submitting the samples and be on standby as results are received. Once the results have been assessed, Cardinal can plan further drill holes to maximise expansion of the gold inventory within the Namdini Project.

For further information contact:

Archie Koimtsidis
Managing Director
Cardinal Resources Limited
P: +233 (0)26 190 5220
Skype: cardinal.archie

APPENDIX 1
NMDD479-779 ASSAY RESULTS

Frm (m)	To (m)	Wdth (m)	Au g/t	Wt Av g/t	Intersection (0.5 g/t cut off)	Description
0.00	1.00	1.00	0.36	0.36		Transported soil
1.00	2.00	1.00	0.37	0.37		Saprolite
2.00	3.00	1.00	0.60	0.60		
3.00	4.00	1.00	0.64	0.64		Highly weathered volcaniclastic
4.00	5.00	1.00	0.05	0.05		
5.00	6.00	1.00	<0.01	<0.01		
6.00	7.00	1.00	<0.01	<0.01		
7.00	8.00	1.00	0.47	0.47		
8.00	9.00	1.00	<0.01	<0.01		
9.00	10.00	1.00	0.03	0.03		
10.00	11.00	1.00	0.31	0.31		
11.00	12.00	1.00	0.92	0.92	)	
12.00	13.00	1.00	0.55	0.55	) 4.0m @ 0.83	
13.00	14.00	1.00	1.33	1.33	)	
14.00	15.00	1.00	0.51	0.51	)	
15.00	16.00	1.00	0.10	0.10		
16.00	17.00	1.00	0.58	0.58		Volcaniclastic + pyrite
17.00	18.00	1.00	0.02	0.02		
18.00	19.00	1.00	0.22	0.22		
19.00	20.00	1.00	0.32	0.32		
20.00	21.00	1.00	0.20	0.20		
21.00	22.00	1.00	0.58	0.58	)	
22.00	23.00	1.00	1.78	1.78	)	
23.00	24.00	1.00	2.62	2.62	)	
24.00	25.00	1.00	4.65	4.65	)	
25.00	26.00	1.00	3.60	3.60	)	
26.00	27.00	1.00	3.57	3.57	)	
27.00	28.00	1.00	2.92	2.92	)	
28.00	29.00	1.00	0.66	0.66	)	
29.00	30.00	1.00	0.65	0.65	)	
30.00	31.00	1.00	1.25	1.25	)	
31.00	32.00	1.00	0.37	0.37	)	
32.00	33.00	1.00	1.02	1.02	)	
33.00	34.00	1.00	0.78	0.78	)	
34.00	35.00	1.00	0.51	0.51	)	Altered granitoid + pyrite
35.00	36.00	1.00	0.70	0.70	)	
36.00	37.00	1.00	1.24	1.24	)	
37.00	38.00	1.00	0.64	0.64	)	
38.00	39.00	1.00	1.04	1.04	)	End of RC
39.00	40.00	1.00	0.95	0.95	)	
40.00	41.00	1.00	0.79	0.79	)	
41.00	42.00	1.00	1.56	1.56	)	
42.00	43.00	1.00	2.37	2.37	)	
43.00	44.00	1.00	0.85	0.85	)	
44.00	45.00	1.00	1.24	1.24	) 47.5m @ 1.30	
45.00	46.00	1.00	1.92	1.92	)	

46.00	47.00	1.00	0.36	0.36	)	
47.00	48.00	1.00	0.92	0.92	)	
48.00	49.00	1.00	0.61	0.61	)	
49.00	50.00	1.00	2.05	2.05	)	
50.00	51.00	1.00	0.46	0.46	)	Altered granitoid + pyrite
51.00	52.00	1.00	0.37	0.37	)	
52.00	53.00	1.00	0.35	0.35	)	
53.00	54.00	1.00	0.67	0.67	)	
54.00	55.00	1.00	0.32	0.32	)	
55.00	56.00	1.00	0.72	0.72	)	
56.00	56.89	0.89	1.21	1.08	)	
56.89	58.00	1.11	0.15	0.17	)	
58.00	59.00	1.00	0.45	0.45	)	
59.00	60.00	1.00	0.22	0.22	)	Altered volcaniclastic + pyrite
60.00	61.00	1.00	1.53	1.53	)	
61.00	61.90	0.90	2.89	2.60	)	
61.90	62.80	0.90	1.85	1.67	)	Altered granitoid + pyrite
62.80	64.00	1.20	4.54	5.45	)	
64.00	65.00	1.00	0.01	0.01	)	
65.00	66.00	1.00	0.25	0.25	)	
66.00	67.00	1.00	0.56	0.56	)	
67.00	67.60	0.60	0.67	0.40	)	
67.60	68.50	0.90	2.64	2.38	)	
68.50	69.00	0.50	0.04	0.02		
69.00	70.00	1.00	0.05	0.05		
70.00	71.00	1.00	0.37	0.37		
71.00	72.00	1.00	0.26	0.26		
72.00	73.00	1.00	<0.01	<0.01		Volcaniclastic + pyrite
73.00	74.00	1.00	0.64	0.64	)	
74.00	75.00	1.00	0.41	0.41	)	
75.00	76.00	1.00	<0.01	<0.01	) 5m @ 1.0	
76.00	77.00	1.00	<0.01	<0.01	)	
77.00	78.00	1.00	3.95	3.95	)	
78.00	79.00	1.00	0.02	0.02		
79.00	80.00	1.00	0.09	0.09		
80.00	81.00	1.00	0.27	0.27		
81.00	82.00	1.00	<0.01	<0.01		
82.00	83.00	1.00	1.14	1.14	)	
83.00	83.66	0.66	0.21	0.14	) 3.16 @ 1.39	
83.66	84.16	0.50	4.04	2.02	)	
84.16	85.16	1.00	1.09	1.09	)	Altered granitoid + pyrite
85.16	86.00	0.84	0.1	0.08		
86.00	87.00	1.00	0.02	0.02		
87.00	88.00	1.00	0.04	0.04		
88.00	89.00	1.00	<0.01	<0.01		
89.00	90.00	1.00	<0.01	<0.01		Volcaniclastic + pyrite
90.00	91.00	1.00	<0.01	<0.01		
91.00	92.00	1.00	0.05	0.05		
92.00	92.50	0.50	<0.01	<0.01		
92.50	93.54	1.04	2.04	2.12	)	
93.54	94.21	0.67	0.11	0.07	)	

94.21	95.00	0.79	0.31	0.24	) 5.50 @ 1.16	
95.00	96.00	1.00	1.26	1.26	)	
96.00	97.00	1.00	1.86	1.86	)	Altered granitoid + pyrite
97.00	98.00	1.00	0.8	0.80	)	
98.00	99.00	1.00	0.4	0.40		
99.00	99.52	0.52	0.35	0.18		
99.52	100.00	0.48	0.28	0.13		
100.00	101.00	1.00	0.06	0.06		
101.00	102.00	1.00	<0.01	<0.01		Volcaniclastic + pyrite
102.00	103.00	1.00	<0.01	<0.01		
103.00	104.00	1.00	0.02	0.02		
104.00	104.74	0.74	0.03	0.02		
104.74	105.30	0.56	0.3	0.17		Altered granitoid + pyrite
105.30	106.30	1.00	0.51	0.51	)	
106.30	107.00	0.70	0.90	0.63	)	
107.00	108.00	1.00	1.74	1.74	) 3.25 @ 1.56	Altered volcaniclastic + pyrite
108.00	108.55	0.55	3.99	2.19	)	
108.55	109.50	0.95	0.02	0.02		
109.50	110.00	0.50	<0.01	<0.01		
110.00	111.00	1.00	<0.01	<0.01		Volcaniclastic + pyrite
111.00	112.00	1.00	<0.01	<0.01		
112.00	113.00	1.00	<0.01	<0.01		
113.00	114.00	1.00	0.55	0.55	)	
114.00	115.00	1.00	16.60	16.60	) 3m @ 9.68	Altered volcaniclastic + pyrite
115.00	116.00	1.00	11.90	11.90	)	
116.00	117.00	1.00	0.04	0.04		
117.00	118.00	1.00	0.25	0.25		
118.00	119.00	1.00	0.07	0.07		
119.00	120.00	1.00	<0.01	<0.01		
120.00	121.00	1.00	<0.01	<0.01		
121.00	122.00	1.00	<0.01	<0.01		
122.00	123.00	1.00	0.07	0.07		
123.00	124.00	1.00	0.42	0.42		Volcaniclastics, weak-moderate bleaching
124.00	125.00	1.00	0.07	0.07		
125.00	126.00	1.00	<0.01	<0.01		
126.00	127.00	1.00	0.22	0.22		
127.00	128.00	1.00	<0.01	<0.01		
128.00	129.00	1.00	<0.01	<0.01		
129.00	130.00	1.00	<0.01	<0.01		
130.00	131.00	1.00	0.54	0.54	)	
131.00	132.00	1.00	0.93	0.93	)	
132.00	133.00	1.00	2.14	2.14	)	
133.00	134.00	1.00	0.55	0.55	)	
134.00	135.00	1.00	1.12	1.12	)	
135.00	136.00	1.00	0.94	0.94	)	
136.00	136.50	0.50	0.21	0.11	)	
136.50	137.00	0.50	2.24	1.12	)	
137.00	138.00	1.00	0.68	0.68	)	
138.00	139.00	1.00	0.17	0.17	) 22m @ 0.88	
139.00	140.00	1.00	<0.01	<0.01	)	
140.00	141.00	1.00	1.44	1.44	)	
141.00	142.00	1.00	0.31	0.31	)	
142.00	143.00	1.00	0.37	0.37	)	

Cardinal Resources Limited ABN 56 147 325 620

www.cardinalresources.com.au

Ghana: Durugu Residential Area, Kumbosco, Bolgatanga, Ghana P: +233 (0) 261905220 SKYPE: cardinal.archie

Australia: Level 1, 115 Cambridge Street, West Leederville, Perth, 6007 P: +61 (8) 9322 6600 F: +61 (8) 9322 6610

143.00	144.00	1.00	1.79	1.79	)	Mixed unit(volcaniclastics/diorite?)
144.00	145.00	1.00	1.90	1.90	)	
145.00	146.00	1.00	0.70	0.70	)	
146.00	147.00	1.00	0.50	0.50	)	
147.00	148.00	1.00	0.22	0.22	)	
148.00	149.00	1.00	0.25	0.25	)	
149.00	150.00	1.00	0.02	0.02	)	
150.00	151.00	1.00	1.10	1.10	)	
151.00	152.00	1.00	2.45	2.45	)	Altered granitoid + pyrite
152.00	152.50	0.50	0.45	0.23		
152.50	153.00	0.50	0.05	0.03		Diorite
153.00	154.00	1.00	0.02	0.02		
154.00	155.00	1.00	<0.01	<0.01		Mixed unit (diorite/volcaniclastics)
155.00	156.00	1.00	0.02	0.02		
156.00	157.00	1.00	0.05	0.05		
157.00	158.26	1.26	<0.01	<0.01		
158.26	159.00	0.74	0.14	0.10		
159.00	160.00	1.00	0.05	0.05		
160.00	161.00	1.00	0.35	0.35		
161.00	162.00	1.00	0.20	0.20		
162.00	163.00	1.00	0.12	0.12		
163.00	164.00	1.00	1.06	1.06	)	
164.00	165.00	1.00	3.82	3.82	) 2.8m @ 2.88	Diorite (sheared) + qtz veins + minor v'clastic
165.00	165.80	0.80	3.96	3.17	)	
165.80	167.00	1.20	0.29	0.35		
167.00	168.00	1.00	0.02	0.02		
168.00	169.00	1.00	<0.01	<0.01		
169.00	170.00	1.00	0.05	0.05		
170.00	171.00	1.00	<0.01	<0.01		
171.00	172.00	1.00	<0.01	<0.01		
172.00	173.00	1.00	<0.01	<0.01		
173.00	174.00	1.00	0.20	0.20		
174.00	175.00	1.00	0.03	0.03		
175.00	176.00	1.00	0.02	0.02		
176.00	177.00	1.00	2.45	2.45		
177.00	178.00	1.00	0.04	0.04		
178.00	179.00	1.00	0.15	0.15		
179.00	180.00	1.00	0.05	0.05		
180.00	181.00	1.00	0.01	0.01		Diorite
181.00	182.00	1.00	0.02	0.02		
182.00	183.00	1.00	0.03	0.03		
183.00	184.00	1.00	<0.01	<0.01		
184.00	185.00	1.00	0.02	0.02		
185.00	186.00	1.00	2.46	2.46		
186.00	187.00	1.00	0.06	0.06		
187.00	188.00	1.00	0.03	0.03		
188.00	189.00	1.00	0.05	0.05		
189.00	190.00	1.00	0.42	0.42		
190.00	191.00	1.00	0.03	0.03		
191.00	192.00	1.00	0.01	0.01		
192.00	193.00	1.00	0.58	0.58		
193.00	194.00	1.00	0.07	0.07		
194.00	195.00	1.00	0.02	0.02		
195.00	196.00	1.00	0.02	0.02		

Cardinal Resources Limited ABN 56 147 325 620

www.cardinalresources.com.au

Ghana: Durugu Residential Area, Kumbosco, Bolgatanga, Ghana P: +233 (0) 261905220 SKYPE: cardinal.archie

Australia: Level 1, 115 Cambridge Street, West Leederville, Perth, 6007 P: +61 (8) 9322 6600 F: +61 (8) 9322 6610

196.00	197.00	1.00	<0.01	<0.01
197.00	198.00	1.00	0.03	0.03
198.00	199.00	1.00	<0.01	<0.01
199.00	200.00	1.00	<0.01	<0.01
200.00	201.00	1.00	<0.01	<0.01
201.00	202.00	1.00	<0.01	<0.01
202.00	203.00	1.00	<0.01	<0.01
203.00	204.00	1.00	<0.01	<0.01
204.00	205.00	1.00	<0.01	<0.01
205.00	206.00	1.00	<0.01	<0.01
206.00	207.00	1.00	<0.01	<0.01
207.00	208.00	1.00	0.11	0.11
208.00	209.00	1.00	0.76	0.76
209.00	210.00	1.00	0.02	0.02
210.00	211.00	1.00	<0.01	<0.01
211.00	212.00	1.00	0.06	0.06
212.00	212.85	0.85	0.06	0.05
212.85	213.40	0.55	0.18	0.10
213.40	214.00	0.60	0.02	0.01
214.00	215.00	1.00	<0.01	<0.01
215.00	216.00	1.00	<0.01	<0.01
216.00	217.00	1.00	0.02	0.02
217.00	218.00	1.00	<0.01	<0.01
218.00	219.00	1.00	<0.01	<0.01
219.00	220.00	1.00	<0.01	<0.01
220.00	221.00	1.00	<0.01	<0.01
221.00	222.00	1.00	<0.01	<0.01
222.00	223.00	1.00	0.02	0.02
223.00	224.00	1.00	<0.01	<0.01
224.00	225.00	1.00	0.08	0.08
225.00	226.00	1.00	<0.01	<0.01
226.00	227.00	1.00	<0.01	<0.01
227.00	228.00	1.00	0.02	0.02
228.00	229.00	1.00	<0.01	<0.01
229.00	230.00	1.00	<0.01	<0.01
230.00	231.00	1.00	<0.01	<0.01
231.00	232.00	1.00	<0.01	<0.01
232.00	233.00	1.00	<0.01	<0.01
233.00	234.00	1.00	<0.01	<0.01
234.00	235.00	1.00	<0.01	<0.01
235.00	236.00	1.00	<0.01	<0.01
236.00	237.00	1.00	0.04	0.04
237.00	238.00	1.00	<0.01	<0.01
238.00	239.00	1.00	0.04	0.04
239.00	240.00	1.00	<0.01	<0.01
240.00	241.00	1.00	<0.01	<0.01
241.00	242.00	1.00	<0.01	<0.01
242.00	243.00	1.00	0.03	0.03
243.00	244.00	1.00	<0.01	<0.01
244.00	245.00	1.00	0.76	0.76
245.00	246.00	1.00	<0.01	<0.01
246.00	247.00	1.00	0.05	0.05
247.00	248.00	1.00	<0.01	<0.01
248.00	249.00	1.00	<0.01	<0.01

Diorite

Metasediment, sheared with intense quartz veining

Mixed unit (metasediment/diorite)

Metasediment, sheared with intense quartz

Cardinal Resources Limited ABN 56 147 325 620

www.cardinalresources.com.au

Ghana: Durugu Residential Area, Kumbosco, Bolgatanga, Ghana P: +233 (0) 261905220 SKYPE: cardinal.archie

Australia: Level 1, 115 Cambridge Street, West Leederville, Perth, 6007 P: +61 (8) 9322 6600 F: +61 (8) 9322 6610

249.00	250.00	1.00	<0.01	<0.01	veining E.O.H
250.00	251.00	1.00	0.02	0.02	
251.00	252.00	1.00	<0.01	<0.01	
252.00	253.00	1.00	<0.01	<0.01	

0.5 g/t cut off contains not more than 3 consecutive samples <0.5 g/t

APPENDIX 2

NMDD500-788 ASSAY RESULTS

Frm (m)	To (m)	Wdth (m)	Au g/t	Wt Av g/t	Intersection (0.5 g/t cut off)	Description
0.00	1.00	1.00	0.55	0.55	)	Transported
1.00	2.00	1.00	1.08	1.08	) 2m @ 0.82	
2.00	3.00	1.00	0.43	0.43		
3.00	4.00	1.00	0.31	0.31		
4.00	5.00	1.00	0.12	0.12		
5.00	6.00	1.00	0.07	0.07		
6.00	7.00	1.00	0.06	0.06		
7.00	8.00	1.00	0.08	0.08		
8.00	9.00	1.00	0.13	0.13		
9.00	10.00	1.00	0.02	0.02		
10.00	11.00	1.00	0.02	0.02		
11.00	12.00	1.00	0.02	0.02		
12.00	13.00	1.00	0.1	0.10		
13.00	14.00	1.00	0.02	0.02		
14.00	15.00	1.00	0.04	0.04		
15.00	16.00	1.00	0.86	0.86	)	Saprolite
16.00	17.00	1.00	0.92	0.92	)	
17.00	18.00	1.00	0.84	0.84	) 4m @ 0.80	
18.00	19.00	1.00	0.59	0.59	)	
19.00	20.00	1.00	0.11	0.11		
20.00	21.00	1.00	0.02	0.02		
21.00	22.00	1.00	0.02	0.02		
22.00	23.00	1.00	0.03	0.03		
23.00	24.00	1.00	0.03	0.03		
24.00	25.00	1.00	0.05	0.05		
25.00	26.00	1.00	0.02	0.02		Weathered volcanics
26.00	27.00	1.00	0.18	0.18		
27.00	28.00	1.00	0.27	0.27		
28.00	29.00	1.00	0.02	0.02		
29.00	30.00	1.00	<0.01	<0.01		
30.00	31.00	1.00	<0.01	<0.01		Volcanics
31.00	32.00	1.00	<0.01	<0.01		
32.00	33.00	1.00	<0.01	<0.01		
33.00	34.00	1.00	0.02	0.02		
34.00	35.00	1.00	0.44	0.44		
35.00	36.00	1.00	0.34	0.34		Altered granitoids + pyrite
36.00	37.00	1.00	0.21	0.21		
37.00	38.00	1.00	0.3	0.30		
38.00	39.00	1.00	1.1	1.10	)	
39.00	40.00	1.00	0.64	0.64	) 2m @ 0.87	
40.00	41.00	1.00	0.15	0.15		
41.00	42.00	1.00	0.15	0.15		

Cardinal Resources Limited ABN 56 147 325 620

www.cardinalresources.com.au

Ghana: Durugu Residential Area, Kumbosco, Bolgatanga, Ghana P: +233 (0) 261905220 SKYPE: cardinal.archie

Australia: Level 1, 115 Cambridge Street, West Leederville, Perth, 6007 P: +61 (8) 9322 6600 F: +61 (8) 9322 6610

42.00	43.00	1.00	0.15	0.15		
43.00	44.00	1.00	0.14	0.14		
44.00	45.00	1.00	0.23	0.23		Volcaniclastics + pyrite
45.00	46.00	1.00	1.07	1.07	)	
46.00	47.00	1.00	2.29	2.29	)	
47.00	48.00	1.00	1.24	1.24	) 5m @ 1.18	
48.00	49.00	1.00	0.74	0.74	)	
49.00	50.00	1.00	0.57	0.57	)	
50.00	51.00	1.00	0.29	0.29		
51.00	52.00	1.00	0.31	0.31		
52.00	53.00	1.00	0.06	0.06		
53.00	54.00	1.00	0.18	0.18		
54.00	55.00	1.00	0.1	0.10		
55.00	56.00	1.00	1.41	1.41	)	
56.00	57.00	1.00	1.24	1.24	)	
57.00	58.00	1.00	0.34	0.34	) 4m @ 0.98	
58.00	59.00	1.00	0.91	0.91	)	
59.00	60.00	1.00	0.25	0.25		
60.00	61.00	1.00	0.17	0.17		
61.00	62.00	1.00	0.09	0.09		Altered granitoids + pyrite
62.00	63.00	1.00	0.08	0.08		
63.00	64.00	1.00	1.38	1.38	)	
64.00	65.00	1.00	0.52	0.52	)	
65.00	66.00	1.00	0.33	0.33	)	
66.00	67.00	1.00	0.66	0.66	)	
67.00	68.00	1.00	0.27	0.27	) 10m @ 0.69	
68.00	69.00	1.00	0.73	0.73	)	
69.00	70.00	1.00	0.26	0.26	)	
70.00	71.00	1.00	0.31	0.31	)	
71.00	72.00	1.00	1.85	1.85	)	
72.00	73.00	1.00	0.63	0.63	)	
73.00	74.00	1.00	0.16	0.16		
74.00	75.00	1.00	0.39	0.39		
75.00	76.00	1.00	0.18	0.18		
76.00	77.00	1.00	0.15	0.15		
77.00	78.00	1.00	0.33	0.33		
78.00	79.00	1.00	0.17	0.17		
79.00	80.10	1.10	0.25	0.27		
80.10	80.60	0.50	4.68	2.34	)	
80.60	81.10	0.50	0.48	0.24	)	
81.10	82.00	0.90	2.44	2.20	)	
82.00	83.00	1.00	0.96	0.96	)	
83.00	84.00	1.00	0.37	0.37	)	
84.00	85.00	1.00	<0.01	<0.01	) 8.8m @ 1.49	Altered volcaniclastics + pyrite
85.00	85.60	0.60	0.31	0.19	)	
85.60	86.45	0.85	4.52	3.84	)	
86.45	87.00	0.55	0.44	0.24	)	
87.00	88.00	1.00	0.37	0.37	)	
88.00	88.90	0.90	2.67	2.40	)	
88.90	90.00	1.10	0.18	0.20		
90.00	91.00	1.00	0.07	0.07		
91.00	92.00	1.00	<0.01	<0.01		
92.00	92.86	0.86	0.02	0.02		
92.86	93.70	0.84	0.22	0.18		

Cardinal Resources Limited ABN 56 147 325 620

www.cardinalresources.com.au

Ghana: Durugu Residential Area, Kumbosco, Bolgatanga, Ghana P: +233 (0) 261905220 SKYPE: cardinal.archie

Australia: Level 1, 115 Cambridge Street, West Leederville, Perth, 6007 P: +61 (8) 9322 6600 F: +61 (8) 9322 6610

93.70	94.30	0.60	1.05	0.63	)	
94.30	95.00	0.70	<0.01	<0.01		
95.00	96.00	1.00	0.01	0.01		
96.00	97.00	1.00	0.02	0.02		
97.00	98.00	1.00	0.07	0.07		
98.00	98.50	0.50	0.03	0.02		
98.50	99.00	0.50	1.66	0.83	)	Altered volcaniclastics + pyrite
99.00	100.00	1.00	0.09	0.09	)	
100.00	100.50	0.50	0.45	0.23	)	
100.50	101.00	0.50	4.65	2.33	) 5.5m @ 2.51	
101.00	102.00	1.00	6.78	6.78	)	
102.00	103.00	1.00	2.65	2.65	)	
103.00	104.00	1.00	0.88	0.88	)	
104.00	105.00	1.00	0.02	0.02		
105.00	106.00	1.00	<0.01	<0.01		
106.00	107.00	1.00	0.04	0.04		
107.00	108.00	1.00	<0.01	<0.01		
108.00	109.00	1.00	<0.01	<0.01		
109.00	110.00	1.00	<0.01	<0.01		
110.00	111.00	1.00	<0.01	<0.01		
111.00	112.00	1.00	<0.01	<0.01		
112.00	112.80	0.80	<0.01	<0.01		
112.80	114.00	1.20	0.29	0.35		
114.00	115.00	1.00	0.24	0.24		
115.00	115.50	0.50	0.02	0.01		
115.50	116.00	0.50	1.72	0.86		
116.00	117.00	1.00	0.40	0.40		
117.00	118.00	1.00	0.18	0.18		
118.00	119.00	1.00	0.47	0.47		Mixed zone (volcaniclastics/diorite)
119.00	120.00	1.00	0.09	0.09		
120.00	120.85	0.85	0.02	0.02		
120.85	122.00	1.15	<0.01	<0.01		
122.00	123.00	1.00	0.20	0.20		
123.00	124.00	1.00	0.09	0.09		
124.00	125.00	1.00	0.03	0.03		
125.00	126.00	1.00	<0.01	<0.01		
126.00	127.00	1.00	0.69	0.69		
127.00	128.00	1.00	<0.01	<0.01		
128.00	129.00	1.00	<0.01	<0.01		
129.00	130.00	1.00	<0.01	<0.01		
130.00	131.00	1.00	<0.01	<0.01		
131.00	132.00	1.00	<0.01	<0.01		Diorite
132.00	133.00	1.00	<0.01	<0.01		
133.00	134.00	1.00	1.41	1.41	) 1m @ 1.41	
134.00	135.00	1.00	0.03	0.03		
135.00	136.00	1.00	0.02	0.02		
136.00	137.00	1.00	0.33	0.33		
137.00	138.00	1.00	0.03	0.03		
138.00	139.00	1.00	0.35	0.35		
139.00	140.00	1.00	<0.01	<0.01		
140.00	141.00	1.00	0.15	0.15		
141.00	142.00	1.00	<0.01	<0.01		Diorite
142.00	143.00	1.00	<0.01	<0.01		
143.00	144.00	1.00	0.06	0.06		

144.00	145.00	1.00	0.05	0.05
145.00	146.00	1.00	<0.01	<0.01
146.00	147.00	1.00	<0.01	<0.01
147.00	148.00	1.00	0.02	0.02
148.00	149.00	1.00	0.02	0.02
149.00	150.00	1.00	0.02	0.02
150.00	151.00	1.00	0.61	0.61
151.00	152.00	1.00	0.11	0.11
152.00	153.00	1.00	0.04	0.04
153.00	154.00	1.00	0.18	0.18
154.00	155.00	1.00	0.31	0.31
155.00	156.00	1.00	0.03	0.03
156.00	157.00	1.00	<0.01	<0.01
157.00	158.00	1.00	0.08	0.08
158.00	159.00	1.00	<0.01	<0.01
159.00	160.00	1.00	<0.01	<0.01
160.00	161.00	1.00	0.46	0.46
161.00	162.00	1.00	0.12	0.12
162.00	163.00	1.00	<0.01	<0.01
163.00	164.00	1.00	0.02	0.02
164.00	165.00	1.00	0.02	0.02
165.00	166.00	1.00	0.04	0.04
166.00	166.50	0.50	0.19	0.10
166.50	167.00	0.50	<0.01	<0.01
167.00	168.00	1.00	<0.01	<0.01
168.00	169.00	1.00	<0.01	<0.01
169.00	170.00	1.00	<0.01	<0.01
170.00	171.00	1.00	<0.01	<0.01
171.00	172.00	1.00	<0.01	<0.01
172.00	173.00	1.00	<0.01	<0.01
173.00	174.00	1.00	<0.01	<0.01
174.00	175.00	1.00	0.11	0.11
175.00	176.00	1.00	0.02	0.02
176.00	177.00	1.00	0.21	0.21
177.00	178.00	1.00	0.02	0.02
178.00	179.00	1.00	0.10	0.10
179.00	180.00	1.00	<0.01	<0.01
180.00	181.00	1.00	<0.01	<0.01
181.00	182.00	1.00	<0.01	<0.01
182.00	183.00	1.00	<0.01	<0.01
183.00	184.00	1.00	<0.01	<0.01
184.00	185.00	1.00	0.04	0.04
185.00	186.00	1.00	0.02	0.02
186.00	187.00	1.00	0.02	0.02
187.00	188.00	1.00	0.02	0.02
188.00	189.00	1.00	0.03	0.03
189.00	190.00	1.00	0.02	0.02
190.00	191.00	1.00	<0.01	<0.01
191.00	192.00	1.00	0.02	0.02
192.00	193.00	1.00	<0.01	<0.01
193.00	194.00	1.00	<0.01	<0.01
194.00	195.00	1.00	0.03	0.03
195.00	196.00	1.00	<0.01	<0.01

Volcaniclastics
Diorite
Metasedments

196.00	197.00	1.00	0.02	0.02	Metasedments
197.00	198.00	1.00	0.03	0.03	
198.00	199.00	1.00	<0.01	<0.01	
199.00	200.00	1.00	<0.01	<0.01	
200.00	201.00	1.00	0.02	0.02	
201.00	202.00	1.00	<0.01	<0.01	
202.00	203.00	1.00	0.02	0.02	
203.00	204.00	1.00	0.02	0.02	
204.00	205.00	1.00	<0.01	<0.01	
205.00	206.00	1.00	<0.01	<0.01	
206.00	207.00	1.00	<0.01	<0.01	
207.00	208.00	1.00	<0.01	<0.01	
208.00	209.00	1.00	0.34	0.34	
209.00	210.00	1.00	<0.01	<0.01	
210.00	211.00	1.00	<0.01	<0.01	EOH

0.5 g/t cut off contains not more than 3 consecutive samples <0.5 g/t

Competent Person's Statement

Information in this report that relates to the Namdini Project is based on information compiled by **Mr Paul Abbott**, a full time employee of Cardinal Resources Limited, who is a Fellow of the Australasian Institute of Mining and Metallurgy and a Member of the Geological Society of South Africa. Mr Abbott has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person, as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Abbott consents to the inclusion in this report of the statements based on his information in the form and context in which it appears.

Disclaimer

This ASX announcement (Announcement) has been prepared by Cardinal Resources Limited (ABN: 56 147 325 620) ("Cardinal" or "the Company"). It should not be considered as an offer or invitation to subscribe for or purchase any securities in the Company or as an inducement to make an offer or invitation with respect to those securities. No agreement to subscribe for securities in the Company will be entered into on the basis of this Announcement.

This Announcement contains summary information about Cardinal, its subsidiaries and their activities which is current as at the date of this Announcement. The information in this Announcement is of a general nature and does not purport to be complete nor does it contain all the information which a prospective investor may require in evaluating a possible investment in Cardinal.

By its very nature exploration for minerals is a high risk business and is not suitable for certain investors. Cardinal's securities are speculative. Potential investors should consult their stockbroker or

financial advisor. There are a number of risks, both specific to Cardinal and of a general nature which may affect the future operating and financial performance of Cardinal and the value of an investment in Cardinal including but not limited to economic conditions, stock market fluctuations, gold price movements, regional infrastructure constraints, timing of approvals from relevant authorities, regulatory risks, operational risks and reliance on key personnel and foreign currency fluctuations.

Cardinal Resources Limited ABN 56 147 325 620

www.cardinalresources.com.au

Ghana: Durugu Residential Area, Kumbosco, Bolgatanga, Ghana P: +233 (0) 261905220 SKYPE: cardinal.archie

Australia: Level 1, 115 Cambridge Street, West Leederville, Perth, 6007 P: +61 (8) 9322 6600 F: +61 (8) 9322 6610

Certain statements contained in this announcement, including information as to the future financial or operating performance of Cardinal Resources and its projects, are forward-looking statements that:

- may include, among other things, statements regarding targets, estimates and assumptions in respect of mineral reserves and mineral resources and anticipated grades and recovery rates, production and prices, recovery costs and results, capital expenditures, and are or may be based on assumptions and estimates related to future technical, economic, market, political, social and other conditions;
- are necessarily based upon a number of estimates and assumptions that, while considered reasonable by Cardinal Resources, are inherently subject to significant technical, business, economic, competitive, political and social uncertainties and contingencies; and,
- involve known and unknown risks and uncertainties that could cause actual events or results to differ materially from estimated or anticipated events or results reflected in such forward-looking statements.

Cardinal Resources disclaims any intent or obligation to update publicly any forward-looking statements, whether as a result of new information, future events or results or otherwise. The words 'believe', 'expect', 'anticipate', 'indicate', 'contemplate', 'target', 'plan', 'intends', 'continue', 'budget', 'estimate', 'may', 'will', 'schedule' and similar expressions identify forward-looking statements.

All forward looking statements made in this announcement are qualified by the foregoing cautionary statements. Investors are cautioned that forward-looking statements are not guarantees of future performance and accordingly investors are cautioned not to put undue reliance on forward-looking statements due to the inherent uncertainty therein.

No verification: Although all reasonable care has been undertaken to ensure that the facts and opinions given in this Announcement are accurate, the information provided in this Announcement has not been independently verified.

JORC CODE 2012 EDITION – TABLE 1
ADDITIONAL NEAR SURFACE GOLD MINERALISATION AT
NAMDINI Section 1 – Sampling Technique and Data

Criteria	JORC Code Explanation	Commentary
Sampling techniques	Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.	Nature and quality of sampling is carried out under QAQC procedures as per industry standards, with standards and blanks inserted every 22 samples.
	Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.	Sample representivity is ensured through carefully logging, with samples selected according to their lithological units.
	Aspects of the determination of mineralisation that are Material to the Public Report.	The determination of mineralisation is not yet known.
	In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	HQ core is halved with the same half consistently sampled. Approximately 1m samples are taken from which ~4 kg was crushed and a split portion pulverised to produce a 50 g charge for fire assay.
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	HQ core drilling with a standard tube. Triple tube in saprolite at top of the hole. Core is orientated using Reflex equipment
Drill sample recovery	Method of recording and assessing core and chip sample recoveries and results assessed.	Method of recording and assessing core samples was on a hand held Motion F5te Tablet PC using a set of standard templates supplied by Maxwell Geoservices, Perth (Maxwell).
	Measures taken to maximise sample recovery and ensure representative nature of the samples.	The measures taken to maximize sample recovery are by measuring core length drilled against core length recovered
	Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	No relationship is known to exist between sample recovery and grade, and no sample bias may have occurred due to preferential loss/gain of any fine/coarse material.
Logging	Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.	Core samples have been geologically logged to a level of detail to support appropriate future Mineral Resource estimations.
	Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.	Logging is qualitative and quantitative. Core is photographed both in dry and wet form.
	The total length and percentage of the relevant intersections logged.	All holes are logged in full.

Criteria	JORC Code Explanation	Commentary
Sub-sampling techniques and sample preparation	If core, whether cut or sawn and whether quarter, half or all core taken.	HQ core has been drilled, cut in half and sampled, with the remaining half core stored in the original core trays and stacked on shelves under cover
	If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.	
	For all sample types, the nature, quality and appropriateness of the sample preparation technique.	Sample preparation is completed at SGS Laboratories, Ouagadougou, Burkina Faso. All preparation equipment is flushed with barren material prior to the commencement of sample preparation. The entire sample is dried, crushed to a nominal 2mm using a Jaw Crusher, then <1.5 kg is split using a Jones type riffle. The reject sample is retained in the original sample bag. The split is pulverised in a LM2 grinding mill to a nominal 85% passing 75 micron size fraction. An approximate 200 gram sub-sample split is taken for fire assay with the pulverized residue retained in a plastic bag. The pulverized split is fire assayed by standard procedures with an AAS finish to 10 ppb detection limit. Both the remaining reject and pulverized samples are returned and stored at Cardinal's Bolgatanga premises.
	Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.	Quality control procedures adopted for all sub-sampling stages to maximize representivity of samples uses commercial certified reference material (CRM) for standards.
	Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.	Measures taken to ensure that the core sampling is representative is to sample half core within lithological units, usually 1m lengths of the core, or lithological units >0.5m long.
Quality of Assay data and laboratory tests	Whether sample sizes are appropriate to the grain size of the material being sampled.	The sample sizes are considered appropriate to give an accurate indication of gold mineralisation.
	The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.	The pulverized rock sample is weighed and mixed with flux and fused using lead oxide at 1,100°C, followed by cupellation of the resulting lead button (Dore bead). The bead is digested using 1:1 HNO ₃ and HCl and the resulting solution is submitted for analysis.
		The digested sample solution is aspirated into the Flame Atomic Absorption Spectrometer (AAS), aerosolised, and mixed with the combustible gas, acetylene and air. The mixture is ignited in a flame whose temperature ranges from 2,100 to 2,800°C. During combustion, atoms of the gold in the sample are reduced to free, unexcited ground state atoms, which absorb light. Light of the appropriate wavelength is supplied and the amount of light absorbed can be measured against a standard curve. Results have a lower gold detection limit of 10 ppb. The AAS equipment is calibrated with each job.

Criteria	JORC Code Explanation	Commentary
		The analytical technique is industry standard fire assay which is considered to be a total digest of gold.
	For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.	No hand held geophysical tools are used.
	Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	Sample preparation checks for fineness are carried out by the laboratory as part of their internal procedures to ensure the grind size of 85-90% passing 75 micron is being attained. Each batch of 100 samples has 5 checks (20%), with the grind size varying between 87-99% passing 75 micron, which is acceptable. Laboratory QAQC involves the use of internal lab standards using certified reference material and blanks. Certified reference materials, having a range of values, and in-house blanks are inserted in the ratio of 1:22. No duplicate samples are taken as half core samples are submitted for fire assay. External laboratory checks are done on a three monthly basis through Laboratories Quality Services International (LQSI). Recent LQSI checks of Fire Assay analyses on Low Grade Oxide Material produced acceptable levels of accuracy and precision.
Verification of sampling and assaying	The verification of significant intersections by either independent or alternative company personnel.	The verification of significant intersections by either independent or alternative company personnel has not occurred.
	The use of twinned holes.	There has been no use of twinned holes.
	Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.	Primary data was collected on a hand held Motion F5te Tablet PC using a set of standard templates supplied by Maxwell Geoservices, Perth (Maxwell). Daily data was synchronised and digitally captured by Maxwell for validation and compilation into Excel and Access spreadsheets and stored on the Cardinal servers located in Bolgatanga, Ghana, West Africa.
	Discuss any adjustment to assay data.	No adjustments were made to assay data.
Location of data points	Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.	Accuracy of drill hole collar surveys is +/- 3m using a hand held Garmin GPSmap 62s GPS.
	Specification of the grid system used.	WGS84 Sector 30N, with local grid baseline at 010° True North and lines at 50m to 100m intervals and stations at 50m along lines.
	Quality and adequacy of topographic control.	The quality and adequacy of topographic control is +/- 3m using a hand held Garmin GPSmap 62s GPS.
Data spacing and distribution	Data spacing for reporting of Exploration Results.	Data spacing is 50-100m (northing) and 50-100m (easting).

Criteria	JORC Code Explanation	Commentary
	Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.	The data spacing and distribution is considered to be sufficient to establish a degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.
Orientation of data in relation to geological structure	Whether sample compositing has been applied.	No sample compositing has been applied.
	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.	The orientation of sampling achieves unbiased sampling of possible structures as drilling is orientated normal to the dip and foliation of the deposit.
	If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	No orientation based sampling bias has been identified in the data to date.
Sample security	The measures taken to ensure sample security.	The measures taken to ensure sample security are through an independent Ghanaian security contractor. Samples are stored at Cardinal's base camp located at Bolgatanga, Ghana, West Africa under security until collected by SGS Laboratories and transported to their Ouagadougou laboratory in Burkina Faso.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	Sampling techniques are of industry standards. Data is audited by Maxwell Geoservices (Perth), who have not made any other recommendations.

Section 2 – Reporting of Exploration Results

(Criteria listed in section 1 will also apply to this section where relevant)

Criteria	JORC Code Explanation	Commentary
Mineral Tenement and Land Status	Type, name/reference number, location and ownership including agreements or material issues with third parties including joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.	The Namdini Mining Licence is located in NE Ghana. Namdini Mining Limited (NML) holds the mining licence. NML signed a Heads of Agreement with Savannah Mining Ltd (Savannah) to provide "Mining Support" services to NML. Savannah has signed a Heads of Agreement with Cardinal Mining Services Ltd (CMS) to provide "Mining Support" services in relation to the Namdini Mining Licence.
	The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	There are no known impediments to offer "Mining Support" services to Namdini Mining Limited within the Namdini Mining licence area.
Exploration Done by Other Parties	Acknowledgment and appraisal of exploration by other parties.	No previous systematic exploration has been undertaken.
Geology	Deposit type, geological setting and style of mineralisation	The deposit type comprises gold mineralisation within sheared and highly altered rocks containing sulphides (pyrite and arsenopyrite).

Cardinal Resources Limited ABN 56 147 325 620

www.cardinalresources.com.au

Ghana: Durugu Residential Area, Kumbosco, Bolgatanga, Ghana P: +233 (0) 261905220 SKYPE: cardinal.archie

Australia: Level 1, 115 Cambridge Street, West Leederville, Perth, 6007 P: +61 (8) 9322 6600 F: +61 (8) 9322 6610

Criteria	JORC Code Explanation	Commentary
		The geological setting is a Paleoproterozoic Greenstone Belt comprising Birimian metavolcanics, volcanoclastics & metasediments located in close proximity to a major 30 km ~N-S regional shear zone with splays. The style of mineralisation is hydrothermal alteration containing disseminated gold-bearing sulphides
Drill hole information	A summary of all information material to the understanding of the exploration results including tabulation of the following information for all Material drill holes: • Easting and northing of the drill hole collar • Elevation or RL (Reduced Level – elevation above sea level in meters) of the drill hole collar • Dip and azimuth of the hole • Down hole length and interception depth • Hole length	A summary of all information is contained within this announcement.
	If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	There has been no exclusion of information.
Data aggregation methods	In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.	No weighting averaging techniques nor cutting of high grades have yet been undertaken as assay results are awaited.
	Where aggregated intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.	Aggregated intercepts incorporating short lengths of high grade results within the lithological units are calculated to include no more than intervals of 3m below grades of <0.01 g/t Au when assay results are received
	The assumptions used for any reporting of metal equivalent values should be clearly stated.	No metal equivalent values were used for this report.
Relationship between mineralisation widths and intercept lengths	These relationships are particularly important in the reporting of exploration results.	The relationship between mineralisation widths and intercept lengths is not yet known.
	If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.	The geometry of the mineralisation with respect to the drill hole angle is not yet known.
	If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').	Only down hole lengths are reported when assay results are received and true widths of mineralisation are not yet known.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plane view of drill	Appropriate locality map, plan view and sections are included in this announcement.

Criteria	JORC Code Explanation	Commentary
	hole collar locations and appropriate sectional views.	
Balanced Reporting	Where comprehensive reporting of all Exploration Results is not practical, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	The assay results of the diamond drill holes NMRD479-779 and NMRD500-788 are attached.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observation; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	The interpretation of the geological observations shown in Figures 1, 2 and 4 are subject to possible change as new information is gathered. No geochemical surveys, bulk sampling, metallurgical, mineralogical or geotechnical assessments were undertaken.
Further Work	The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large – scale step – out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	A combination of reverse circulation and diamond drilling is planned, followed by possible additional ground geophysical surveys depending on the results of the drilling. The plans included show the possible extent of mineralisation based on geological observations and previous assay results. Future drilling is planned north and west within the Namdini Project Area to obtain strike and down dip extensions to the gold mineralisation.