

ASX: RAU

TSXV: RSM

OTCQB: RSGOF

TSXV Release ASX Release 21 April 2025 22 April 2025

High-Grade Assay Results up to 26% TiO₂ and 18,887ppm TREO at Tiros North Block Support Next Steps Toward Scoping Study

Resouro Strategic Metals Inc. (ASX: RAU; TSX-V: RSM; FSE: 8TX; OTCQB: RSGOF) ("Resouro" or the "Company") is pleased to announce the assay results from 21 auger drill hole for 206 m of drilling, undertaken at the North block of the Tiros Titanium and Rare Earth Elements ("REE") Project in Minas Gerais, Brazil ("Tiros Project" or "Tiros" or "Project").

Highlights

1m at 22% TiO₂ and 18,827ppm TREO from 8m in auger hole FT-32

1m at 25.6% TiO₂ and 12,138ppm TREO from 19m in auger hole FT-28

High-grade results close to surface include:

- 7m at 23.4 TiO₂% and 8,149ppm TREO from 5m depth in auger hole FT29
- 4m at 20.8 TiO₂% and 14,229ppm TREO from 6m depth in auger hole FT32
- 4m at 18.9 TiO₂% and 11,059ppm TREO from 5m depth in auger hole FT42

The recent update of the MRE for the Central Block MRE of 1.4 Billion tonnes of **Measured** and Indicated Resource contains 165 Mt of titanium dioxide (TiO₂), and 5.5 Mt of Total Rare Earths Oxide (TREO) at a Magnet Rare Earths Oxide ("MREO") ratio of 27% and is one of the largest mineral deposits globally. An additional resource of 500 million tonne of Inferred Resource contains 60 million tonnes of TiO₂ and 1.85 million tonnes of TREO.

The current assay results add to the massive resource potential of the Tiros Project area.



NORTH BLOCK ASSAY RESULTS

Results are related to the current auger drilling campaign, designed to evaluate the areas outside the Tiros Central block. The North block was initially chosen because earlier results from auger drilling showed a high-grade zone close to the surface. Assay results exclude additional 18 auger holes for 180m of drilling, from the same North block, with results pending at ALS laboratory, at Vespasiano, Minas Gerais.

All assay intervals (Table 1) are determined using cut-off grades of 1,000ppm for TREO and 6% for TiO₂ while the high-grade zone is defined using a cut-off grade of 6,000ppm for TREO and/or 16% for TiO₂. These results from the Northern Permit of the Tiros North Block confirm high-grade mineralisation is continuous and is either exposed at surface or covered by a thin layer of overburden.

Hole_ID	Туре	From	То	TiO₂ %	TREO ppm	NdPr ppm
noic_ib	Турс	110111	.0	1102 /0	ррш	
FT-26	Auger	10.00	12.00	10.63	2,170	337
FT-27	Auger	0.00	10.70	10.76	4,694	1,520
FT-28	Auger	9.00	20.00	16.97	8,322	1,644
Includes	Auger	14.00	20.00	22.08	11,793	2,441
Also includes	Auger	19.00	20,00	25.6	12,138	2,370
FT-29	Auger	1.00	12.00	19.28	6,669	1,218
Includes	Auger	5.00	12.00	23.41	8,149	1,677
FT-30	Auger	4.00	12.00	13.34	5,606	732
Includes	Auger	10.00	12.00	18.58	10,063	1,915
FT-31	Auger	2.00	13.00	15.24	3,720	646
Includes	Auger	5.00	9.00	17.71	4,070	558
FT-32	Auger	0.00	11.65	15.35	7,178	1,325
Includes	Auger	6.00	10.00	20.81	14,229	2,884
Also includes	Auger	8.00	9.00	22.1	18,827	4,058
FT-33	Auger	0.00	14.00	16.13	5,137	1,147



Includes	Auger	3.00	7.00	20.94	7,001	1,602
FT-34	Auger	0.00	11.00	13.35	3,322	661
Includes	Auger	4.00	6.00	18.60	2,920	719
FT-35	Auger	0.00	1.00	6.02	4,460	653
FT-36	Auger	0.00	3.50	10.30	2,522	610
FT-38	Auger	0.00	8.00	11.93	4,175	1,120
FT-39	Auger	2.00	3.00	6.70	4,139	274
FT-40	Auger	0.00	7.00	8.98	2,570	518
FT-42	Auger	1.00	9.50	15.01	8,118	1,694
Includes	Auger	5.00	9.00	18.90	11,059	2,514
FT-43	Auger	0.00	12.00	11.17	3,513	502
Includes	Auger	11.00	12.00	17.60	9,136	1,766
FT-44	Auger	0.00	1.00	8.62	4,136	1,237
FT-47 (partial)	Auger	8.00	12.00	10.64	1,565	248

Table 1: Significant Assay intervals from Auger Holes, Tiros North

The Tiros North Block, Figure 1, is a plateau, where the Capacete Formation is preserved. Auger holes were positioned along the rim of the plateau, in zones with little or no overburden.



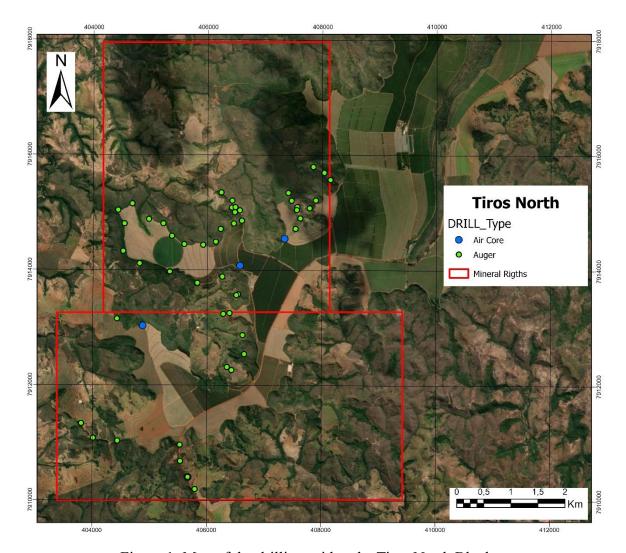


Figure 1: Map of the drilling grid at the Tiros North Block

The geological map of the Capacete formation, Figure 2, demonstrates the relationship between mineralization and overburden. The current campaign targets zones not covered by overburden.



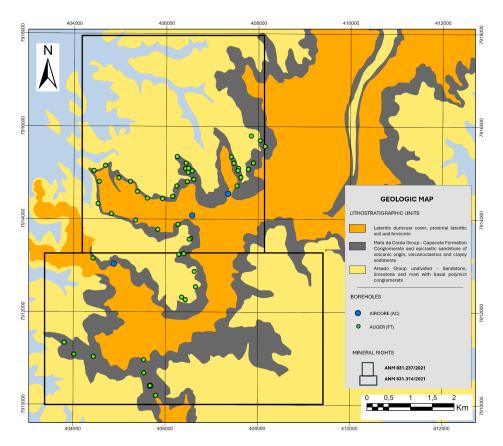


Figure 2: Geological Map at the Tiros North Block

The photo below shows the region where the high-grade zone crops out. The top of the plateau, as seen in the background, has overburden covering the Capacete formation, with a thickness in the order of 20 to 25 m. The valleys, as depicted at the front part of this photograph, shows the mineralization without overburden that is a favourable location to start a mining operation.



Photo 1: View to south, from the North of the Tiros North block.



NEXT STEPS

Resouro will produce a Resource Statement and develop a mine plan to complete a Scoping Study in support of a Trial Mining License application. Work has begun on the Environmental Impact Study required as part of the licensing process. The objective of the Scoping Study is to generate bulk samples of raw, unprocessed material from the North Block, targeting very high-grade, near surface, friable material, for distribution to potential offtake partners. This will help test market interest in direct shipping and guide future development decisions.

In parallel, Resouro will continue evaluating the targets outside its Central block, where drilling is currently concentrated. Exploratory drilling has confirmed the presence of mineralization in both the São Gotardo and North blocks. The Campos Altos block will be mapped with the support of the auger rig, to assess its exploration potential.

This announcement has been authorized for release by the Board of Directors.

Contact Information:

Chris Eager, Alistair Stephens Emily Evans, SPOKE

Executive Chair (Santiago) Chief Executive Officer (Perth) Media and Content Manager

chris.eager@resouro.com alistair.stephens@resouro.com emily@hellospoke.com.au

+44 7388 0579809 +614 88 99 25 +61 401 337 959

About the Company

Resouro is a Canadian incorporated mineral exploration and development company, listed on the ASX, TSXV, OTC and FSE, focused on the discovery and advancement of economic mineral projects in Brazil, including the Tiros Titanium-Rare Earths Project and the Novo Mundo Gold Project. The Tiros project has 28 mineral concessions totalling 497 km² located in the state of Minas Gerais, one of the best infrastructurally developed states of Brazil, 350 km from the state capital of Belo Horizonte. Resouro's Mineral Resource Estimate for the Tiros Project contains 165 million tonne of titanium dioxide and 5.5 million tonne of total rare earths oxides within a Measured and Indicated Resource of 1.4 billion tonne.



DOMAIN	Category	Million Tonne	TiO₂ %	TREO (ppm)	MREO (ppm)	REO/TREO rat
HG (High Grade)	Measured	30	24	9,300	2,500	27%
	Indicated	74	23	8,900	2,300	26%
	M + I	103	23	9,100	2,400	26%
	Inferred	33	22	8,300	2,200	26%
MG (Medium Grade)	Measured	340	11	3,700	1,000	28%
	Indicated	930	11	3,600	1,000	28%
	M + I	1,300	11	3,600	1,000	28%
	Inferred	470	11	3,400	920	27%
TOTAL (HG+MG)	Measured	367	12	4,100	1,100	28%
	Indicated	1,000	12	4,000	1,100	27%
	M + I	1,400	12	4,000	1,100	28%
	Inferred	500	12	3,700	1,000	27%

Note: Further details of the Company's JORC MRE are contained within the Company's announcement of 9 April, 2025. Resouro is not aware of any new information or data that materially affects the information included in the Company's announcement and that all material assumptions and technical parameters underpinning the estimates referred to therein continue to apply and have not materially changed.

Resouro Strategic Metals Inc., capital structure

ASX Chess Depositary Interests	42,833,059
TSXV Common Stock	49,756,990
Total on Issue	92,590,049
Shares held in Escrow included in Total on Issue	10,979,257
Options issued under the Company Plan	12,495,000
Options issued to Brokers	1,843,643
Warrants issued to Brokers	600,616
Performance Rights	750,000
Fully Diluted Securities	108,279,308

Competent Person Statement

The information in this report related to Exploration Targets and Exploration Results for drilling at Tiros is based on information compiled by Mr Rodrigo Mello, a Competent Person who is a Fellow of the Australasian Institute of Mining and Metallurgy (FAusIMM 209332]. Mr Mello is a consultant for Resouro Strategic Metals Inc. and has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify him as Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr. Mello has a financial interest in the project, both as the owner of a minority stake (10% free carried interest) and as a minor shareholder of Resourc. Mr Mello consents to include this information in the report of the matters based on his information in the form and context in which it appears.

The information in this announcement that relates to Mineral Resources is based on, and fairly represents, information compiled and approved by Mr. Simon Mortimer, a Competent and Qualified Person and registered professional geologist (FAIG #7795) with experience in geology, mineral exploration, geological modelling, mineral resource estimation and classification, and database management. Mr. Simon Mortimer is independent of Resouro Strategic Metals Inc.. The mineral resource estimate and the processes involved in its development have been peer reviewed by Mr. Luis Oviedo, a Competent and Qualified Person with significant domain experience in Rare Earth Element deposits. Mr Simon Mortimer is the principal consultant for Atticus Geoscience and has



sufficient experience that is relevant to the style of mineralisation and type of deposit and to the activity being undertaken to qualify as Competent Persons as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves' and as Qualified Person under the National Instrument 43-101 Standards of Disclosure for Mineral Project. Mr Simon Mortimer consents to the inclusion of this information in this announcement of the matters based on his information in the form and context in which it appears.

Forward-Looking Information

This news release contains certain "forward-looking information" within the meaning of applicable securities law. Forward-looking information is frequently characterized by words such as "plan", "expect", "project", "intend", "believe", "anticipate", "estimate" and other similar words, or statements that certain events or conditions "may" or "will" occur. Although we believe that the expectations reflected in the forward-looking information are reasonable, there can be no assurance that such expectations will prove to be correct. We cannot guarantee future results, performance or achievements. Consequently, there is no representation that the actual results achieved will be the same, in whole or in part, as those set out in the forward-looking information.

Forward-looking information is based on the opinions and estimates of management at the date the statements are made and are subject to a variety of risks and uncertainties and other factors that could cause actual events or results to differ materially from those anticipated in the forward-looking information. Some of the risks and other factors that could cause the results to differ materially from those expressed in the forward-looking information include, but are not limited to: general economic conditions in Canada and globally; industry conditions, including governmental regulation and environmental regulation; failure to obtain industry partner and other third party consents and approvals, if and when required; the need to obtain required approvals from regulatory authorities; stock market volatility; liabilities inherent in the mining industry; competition for, among other things, skilled personnel and supplies; incorrect assessments of the value of acquisitions; geological, technical, processing and transportation problems; changes in tax laws and incentive programs; failure to realize the anticipated benefits of acquisitions and dispositions; and the other factors. Readers are cautioned that this list of risk factors should not be construed as exhaustive.

The forward-looking information contained in this news release is expressly qualified by this cautionary statement. We undertake no duty to update any of the forward-looking information to conform such information to actual results or to changes in our expectations except as otherwise required by applicable securities legislation. Readers are cautioned not to place undue reliance on forward-looking information.

Neither the ASX, OTC, TSX Venture Exchange nor its Regulation Services Provider (as that term is defined in the policies of the TSX Venture Exchange) accepts responsibility for the adequacy or accuracy of this release.



Appendix 1: Drill Collar Locations

HoleID	Х	Υ	Z	ЕОН
FT-26	406,487	7,915,096	1,007	12.00
FT-27	406,432	7,915,209	975	10.70
FT-28	406,566	7,915,040	1,010	20.00
FT-29	406,477	7,915,008	998	12.00
FT-30	406,600	7,914,858	1,001	12.00
FT-31	405,925	7,914,437	985	13.00
FT-32	405,594	7,914,448	952	12.00
FT-33	407,538	7,914,721	987	14.00
FT-34	407,620	7,914,903	972	11.00
FT-35	407,568	7,915,100	958	4.00
FT-36	407,468	7,915,209	961	4.50
FT-37	407,411	7,915,344	957	4.00
FT-38	407,559	7,915,048	969	8.50
FT-39	407,848	7,915,796	948	6.00
FT-40	408,040	7,915,689	966	7.00
FT-41	408,234	7,915,597	1,019	12.00
FT-42	408,147	7,915,572	869	9.50
FT-43	405,380	7,914,593	958	12.00
FT-44	406,241	7,915,350	987	1.80
FT-45	404,976	7,914,885	946	5.00
FT-46	404,549	7,914,804	985	15.00
FT-47	406,460	7,914,811	1,037	15.00



Appendix 2: Drill assay results

HOLEID		то	Ceppm	Dyppm		Euppm		Hoppm		Luppm	Ndppm			Tbppm	Tmppm				NdPrO ppm	
FT-26 FT-26	7			16	8	9	25	3	66 255	1	23 249	68	37	3	1	26 72	7	5.64 5.24		2,154
FT-26	8			9	6	4	12	2	177	1	119	35	18	2	1	54	7	6.6		1,522
FT-26	9	10	399	6	4	2	5	1	122	1	45	14	6	1	1	30	4	7.69		751
FT-26	10		1,090	8	4	5	10	2	167	0	141	39	20	2	1	31	4	10.9		1,785
FT-26 FT-27	11	12		12 52	17	10 44	106	8	375 1,180	0	304 1,235	90 325	45 165	3 11	2	37 182	9	10.35		2,555 5,501
FT-27	1			55	18	45	111	8	1,240	1	1,280	335	170	12	2	194	9	9.82		5,728
FT-27	2		_	41	14	32	83	6	932	1	933	234	134	9	1	156	7	10.85		4,506
FT-27	3			73	24	55	147	11	1,340	2	1,495	388	212	15	3	289	12	9.89		5,934
FT-27 FT-27	5			81 57	30 22	58 46	152 122	13	1,305 1,180	1	1,490 1,280	382	217 178	16 13	2	355 233	16 11	11.15		6,117 5,483
FT-27	6			23	8	20	52	4	556	1	591	158	81	6	1	86	4	9.62		2,864
FT-27	7	_	-	32	12	27	73	5	776	1	794	209	107	8	1	131	6	11.3		3,833
FT-27	8		-	33	11	27	70	5	821	1	790	208	109	8	1	124	6	10.85		4,391
FT-27 FT-27	9		932	29 22	11 8	23 17	61 45	5 4	835 800	1	662 585	184 172	91 70	7 5	1 1	108 87	5 4	10.75		3,471 3,429
FT-28	7	8		4	3	1	3	1	39	0	27	8	4	1	0	19	3	4.76		216
FT-28	8	9	1,030	18	8	15	36	3	414	1	441	125	63	4	1	72	6	4.8	665	2,626
FT-28	9		635	16	10	9	24	3	239	1	249	68	38	3	1	80	8	7.63		1,629
FT-28 FT-28	10	11 12	909	18 16	8	11 12	29 31	3	321 449	1	337 379	88 109	51 53	4	1 1	73 50	6	10.55		2,186 2,760
FT-28	12			14	5	11	30	2	817	0	360	112	45	3	1	42	3	11.95		5,177
FT-28	13	14	4,050	36	13	29	71	6	2,040	1	923	296	115	8	1	101	8	13.5	1,435	9,029
FT-28	14			49	16	48	112	7	1,860	1	1,530	444	202	12	2	132	8	19.5		12,971
FT-28 FT-28	15 16		6,230 4,680	62 57	20 19	60 55	139 130	9	2,370 2,420	1	1,875 1,755	547 509	249 223	15 14	2	174 187	10 9	20.5		13,798 11,816
FT-28	17	18	4,680	47	19	47	110	7	1,965	1	1,755	428	199	12	1	131	7	24.1		10,215
FT-28	18		4,030	47	14	46	108	7	1,920	1	1,445	415	193	12	1	127	7	22.7		9,821
FT-28	19		_	58	19	52	127	9	2,010	1	1,565	450	216	14	2	184	10	25.6		12,138
FT-29	0		361	3	2	2	5	1	110	0	57	18	8	1	0	15	2	2.91		685
FT-29 FT-29	1 2			10	5	3 5	14	2	227 491	1	87 169	29 57	11 19	2	1 1	29 37	3	7.18 11.95		1,744 3,055
FT-29	3			15	6	9	23	3	722	1	259	87	34	3	1	50	5	13.65		5,833
FT-29	4		2,730	23	10	17	42	4	1,140	1	549	173	71	5	1	72	7	15.5	849	5,683
FT-29	5			46	14	43	102	7	2,060	1	1,385	414	179	11	1	122	8	21.2		10,571
FT-29 FT-29	7		4,330 2,700	45 32	12 10	46 29	101 70	5	1,835 1,350	1	1,360 941	399 275	182 122	7	1 1	112 86	6 5	25.8 19.85		9,905 6,608
FT-29	8			48	16	42	107	7	1,795	1	1,220	356	167	12	2	152	8	25.6		9,272
FT-29	9		-	42	13	35	88	6	1,545	1	1,070	321	143	10	1	126	6	25.1		7,941
FT-29	10		2,570	34	11	30	73	5	1,305	1	874	262	117	8	1	102	6	22.6		6,333
FT-29 FT-30	11		2,770 175	31	9	26 1	62	1	1,240 72	0	843 45	262 13	110	7	0	93	5 2	23.7		6,410
FT-30	1	2		3	2	1	3	1	55	0	28	9	4	0	0	16	2	3.47		360
FT-30	2			4	3	1	3	1	43	0	26	8	4	1	0	20	3	5.87		437
FT-30 FT-30	3			5 6	4	1	4	1	55 150	1	24 42	7 14	5	1	1 1	32 35	4	6.57 7.69		854 1,497
FT-30	5		,	8	4	4	11	1	581	0	143	49	17	2	1	33	3	10.5		3,103
FT-30	6			10	4	5	16	2	728	0	196	65	22	3	0	31	3	14.35		4,308
FT-30	7			9	4	5	14	2	638	1	187	64	22	3	1	34	4	12.8		5,830
FT-30	9			12 21	5 8	7 14	19 34	3	759	1	245 481	150	30 60	3 5	1	43 70	5 7	10.05		4,322
FT-30 FT-30	10		2,970 4,270	37	11	33	74	5	1,005 1,650	1	1,195	150 383	147	9	1	101	7	18.45		5,665 9,295
FT-30	11			44	15	34	79	6	2,240	1	1,265	412	154	10	2	141	10	18.7		10,832
FT-31	0		548	4	2	2	6	1	169	0	80	26	10	1	0	17	2	3.88		1,019
FT-31 FT-31	2			5 7	2	3	7 11	1	196 375	0	95 161	31 51	12 19	1 2	0	19 27	2	3.99 7.43		1,164 2,080
FT-31	3			11	4	7	19	2	585	0	229	74	28	3	0	45	3	13.1		3,103
FT-31	4	5	4 000	13	5	8	23	2	610	0	253	78	33	3	1	52	3	16.85		3,500
FT-31	5			13	4	8	23	2	638	0	287	88	36	3	0	47	3	17		4,107
FT-31 FT-31	7			12 19	6	9	23 37	3	649 897	0	304 469	93 139	38 59	3	1	39 58	3	19 15.6		4,183 4,574
FT-31	8			16	5	13	32	2	654	0	403	115	54	4	1	54	3	19.25		3,416
FT-31	9			18	6	15	37	3	806	0	521	148	67	4	1	57	3	15.8	787	3,886
FT-31	10		-	18	6	14	35	3	954	1	492	149	59	4	1	60	3	11.65		3,505
FT-31 FT-31	11			17 37	5 12	15 32	34 76	3 5	761 1,025	0	513 1,040	147 291	65 139	8	1 1	51 126	7	16.3 15.7		3,706 4,856
FT-31	0			6	3	32	8	1	252	0	91	30	139	1	0	25	3	8.18		2,167
FT-32	1			8	4	4	12	1	467	1	145	49	18	2	1	34	4	12.5		2,942
FT-32	2			11	5	6	16	2	738	1	213	74	24	2	1	41	4	12.75		3,393
FT-32 FT-32	3		_	8	3	5	12	1	563 632	0	170 187	57 63	20 21	2	0	28 28	3	12.9 12.35		2,596 2,393
FT-32	5			12	6	7	17	2	540	1	230	72	27	2	1	48	6	12.35		2,393
FT-32	6			35	13	32	69	6	1,645	2	1,020	301	130	8	2	116	10	18.85		8,655
FT-32	7			63	20	67	145	10	2,130	2	2,110	581	278	16	2	179	13	21.1		13,832
FT-32	8		_	84	25	88	187	12	3,520	2	2,690	761	348	21	3	235	15	22.1		18,827
FT-32 FT-32	10			68 32	24 12	61 29	137 63	11 5	2,170 1,040	1	1,835 853	514 241	240 112	17 7	3	252 97	15 8	21.2 13.25		15,600 5,588
FT-32	11			38	13	35	81	6	1,310	1		280	131	9	2	114	9	16.75		8,103
FT-32	11.65	12	698	7	3	6	15	1	237	0	207	56	26	2	0	25	2	2.18	310	1,509



HOLEID	FROM	TO	Ceppm	Dyppm	Erppm	Euppm	Gdppm	Hoppm	Lappm	Luppm	Ndppm	Prppm	Smppm	Tbppm	Tmppm	Yppm	Yhnnm	TiO2%	NdPrO ppm	TREOnom
FT-33	0	1		17	5	13	30	2	669	1	382	110	54	4	1	55	4	11.9	578	3,871
FT-33	1	2		22	6	20	46	3	995	0	667	187	89	6	1	56	4	15.9	1,004	5,397
FT-33	2	3		22	6	16	42	3	1,075	1	470	133	60	5	1	63	4	16.1	708	3,762
FT-33 FT-33	3	5		24 30	7	21 26	50 65	3	916 1,340	1	627 832	171 226	85 109	7	1	66 88	5	19.85 20.3	938 1,244	4,171 5,681
FT-33	5	6		41	11	43	94	6	1,585	1	1,395	367	189	10	1	104	6	21.4	2,071	7,816
FT-33	6	7	4,610	48	13	47	108	7	1,800	1	1,450	383	200	12	1	128	7	22.2	2,155	10,337
FT-33	7	8	1,825	22	7	21	49	3	1,080	1	716	195	92	6	1	67	4	11.2	1,070	4,795
FT-33	8	9		20	6	20	45	3	973	0	688	198	94	5	1	62	4	9.17	1,042	4,000
FT-33	9	10	_	22	7	21	51	3	770	0	706	178	94	6	1	64	4	12.65	1,038	4,038
FT-33 FT-33	10 11	11 12	1,725 1,695	21	6	20	48 48	3	818 895	0	646 666	171 179	89 86	5 5	1	57 55	3	14.6 15.45	960 993	4,238 4,321
FT-33	12	13	_	22	6	21	51	3	918	0	701	187	92	6	1	57	3	16.85	1,043	4,466
FT-33	13	14	-	33	9	29	72	4	952	1	824	210	115	8	1	94	4	18.25	1,215	5,029
FT-34	0	1	1,325	15	5	11	27	2	499	0	361	96	48	3	1	49	4	11.45	538	2,869
FT-34	1	2		13	5	10	25	2	535	0	332	93	44	3	1	46	3	12	499	3,035
FT-34	2	3		17	5	16	36	3	802	0	481	149	62	4	1	54	3	15.05	741	3,980
FT-34 FT-34	3	5		18 16	5	17 15	38 32	2	757 545	0	526 463	156 131	67 62	3	1	61 47	3	12.6 17.95	802 698	4,084 2,668
FT-34	5	6		17	5	17	36	2	722	0	485	145	63	4	1	53	4	19.25	740	3,172
FT-34	6	7	2,010	15	5	13	29	2	586	0	373	114	49	3	1	47	4	12.9	572	3,812
FT-34	7	8		14	5	12	27	2	561	0	349	106	44	3	1	43	3	11.1	535	3,382
FT-34	8	9		21	7	16	40	3	726	1	478	143	61	5	1	86	5	11.7	730	3,608
FT-34	9	10	1,055 960	21	9	16	38	2	724	0	464 457	142	59	5	1	108	5	12.15	712	3,116
FT-34 FT-35	10	11		17 13	5	14 14	28	2	649 464	0	434	138 122	58 59	3	1	54 38	3	10.7 6.02	699 653	2,811 4,460
FT-35	1	2	761	7	2	8	16	1	240	0	251	67	34	2	0	21	2	2.44	374	1,657
FT-35	2	3	266	5	2	6	12	1	150	0	176	45	26	1	0	17	1	1.18	260	832
FT-36	0	1	760	11	4	11	24	2	550	0	321	101	42	3	0	39	2	11.5	496	2,194
FT-36	1	2	716	12	3	11	25	2	582	0	337	107	42	3	0	40	2	10.05	522	2,210
FT-36 FT-36	2	3.5	848 1,150	13 12	3	14 15	30 29	2	643 1,015	0	416 603	128 209	53 63	3	0	41 38	2	9.02	956	2,579 3,691
FT-36	3.5	4.5		6	2	11	17	1	1,130	0	639	244	55	2	0	15	1	1.26	1,040	3,804
FT-37	0	1	692	11	4	11	24	2	455	0	327	99	40	3	1	40	3	4.88	501	2,009
FT-37	1	2	379	6	2	6	12	1	333	0	222	74	26	1	0	19	1	1.56	348	1,270
FT-37	2	3	763	5	1	6	12	1	510	0	316	113	31	1	0	14	1	0.69	505	2,082
FT-37	3	4		3	1	4	7	0	252	0	183	61	17	1	0	12	1	0.41	287	1,002
FT-38 FT-38	0	1 2	-	39 56	16 19	30 43	76 110	7	1,020	1 2	926 1,320	251 353	132 192	8 11	2	200 214	10 13	11.2 16	1,384 1,967	5,616 6,299
FT-38	2	3	_	30	10	21	56	5	778	1	624	161	89	6	1	103	7	13.15	922	3,409
FT-38	3	4		26	9	19	51	4	755	1	582	164	86	5	1	95	6	11.1	877	3,153
FT-38	4	5	1,605	25	8	18	46	4	730	1	561	158	83	5	1	83	5	11.15	845	3,914
FT-38	5	6		24	8	18	46	4	752	1	546	157	79	5	1	84	5	12.2	826	3,334
FT-38 FT-38	7	7 8	1,055	27 38	10	18 28	46 71	5	740 1,005	1	528 885	157 251	79 125	5 8	1	116 107	7	11.75 8.92	806 1,336	3,283 4,393
FT-38	8	8.5	_	38	7	34	108	4	779	0	884	245	146	10	1	53	3	1.02	1,337	4,019
FT-39	0	1	657	5	2	3	8	1	163	0	96	28	14	1	0	17	2	3.45	146	1,169
FT-39	1	2	870	6	2	4	9	1	200	0	114	36	17	1	0	19	2	3.86	175	1,500
FT-39	2	3		8	3	6	14	1	332	0	178	55	25	3	0	24	2	6.7	274	4,139
FT-39	3	5		3	2	3	6	1	116	0	77	22	10	1	0	13	1	2.15		778 748
FT-39 FT-39	5	6		3	1	3	6 5	0	103 70	0	71	23	11 9	1	0	12	1	1.6 0.7	117 107	361
FT-40	0	1		14	5	11	26	2	492	1	318	94	47	3	1	52	4	10.5	484	2,759
FT-40	1	2	1,360	13	5	9	24	2	493	0	282	86	39	3	1	48	4	10.3	433	2,781
FT-40	2	3	_	15	6	11	27	2	621	1	330	101	47	3	1	50	4	11.6	506	3,160
FT-40	3	4		18	7	15	37	3	518	1	411	115	58	4	1	67	4	9.14	618	2,727
FT-40 FT-40	5	5 6	1,065 741	19 16	7	15 12	39 32	3	479 439	0	435 354	118 100	60 50	5 4	1	70 64	4	8.28 7.36	650 534	2,723 2,146
FT-40	6	7		13	5	10	26	2	313	0	268	72	38	3	0	52	3	5.71	400	1,692
FT-42	0			11	5	6	15	2	187	1	147	43	23	2	1	44	4	5.56		1,789
FT-42	1	2	2,940	20	8	17	40	3	639	1	518	149	74	6	1	73	5	9.85	784	5,269
FT-42	2	3		17	7	13	33	3	841	1	400	126	52	4	1	60	5	9.62		3,499
FT-42	3		-	18	10	15	35 61	3	1,175	1	514 815	163	62 108	5	1	54 86	7	12.6	797 1 242	6,243
FT-42 FT-42	5	5 6		30 88	10 28	27 79	61 177	13	1,330 2,810	1 2	815 2,340	241 699	108 325	8 22	3	86 267	16	13.8 22.6		6,239 17,281
FT-42	6			49	15	45	100	7	1,800	1	1,345	382	183	12	2	136	9	18.3		8,924
FT-42	7			37	12	36	81	5	1,465	1	1,145	319	152	10	1	99	6	16.8		7,330
FT-42	8			71	24	65	149	11	2,230	2	1,830	492	250	17	3	251	13	17.9		10,702
FT-42	9	9.5		43	13	40	98	6	1,505	1	1,210	327	160	10	1	143	7	12.25	1,807	7,036
FT-43 FT-43	0			5 6	3	3	8	1	253 232	0	107 104	37 36	13 14	1	0	22	3	10.1 8.44	169 164	1,784 1,611
FT-43	2			4		2	5	1	149	0	70	23	9	1	0	19	2	6.01	109	1,611
FT-43	3			5	4	2	5	1	115	1	51	17	7	1	0	31	4	7.02	80	741
FT-43	4	5		6	4	2	5	1	105	1	52	17	8	1	1	36	4	9.02	81	775
FT-43	5			6	3	3	7	1	268	0	98	32	12	1	0	24	3	13.75	152	1,351
FT-43	6			12	5	10	22	2	1,140	1	318	107	38	3	1	41	4	15.05	500	4,401
FT-43	7 8	8	-	16	6	12	28	2	1,220	1	421	138	51 39	4	1	53 52	5	12.2	657 560	4,842 5.106
FT-43 FT-43	9		_	14 22	7	10 17	25 42	3	1,190 1,385	1	355 557	121 174	65	5	1	73	5	11.1	859	5,106 6,118
FT-43	10	11		29	11	20	49	5	940	1	609	177	81	6	1	97	10	11.8	924	5,065
FT-43	11	12		47	17	39	88	7	1,405	2	1,170	332	156	10	2	169	12	17.6		9,136
FT-44	0	1	-	27	9	22	54	4	1,065	1	814	238	93	6	1	111	5	8.62		4,136
FT-47	6	7		5	3	1	4	1	36	1	25	7	5	1	0	29	3	5.13		486
FT-47 FT-47	7		_	10	6	2	8	2	39	1	34	9	8	1	1	48	6	5.33	51	1,518
E1-/1/	8	9	579 671	10	4	7	11 17	2	127 211	1	101 203	29 57	16 29	1 2	1	32 39	5	10.35 9.9	153 305	1,080 1,476
	Q I							4					20	_		- 55	-	0.0		1,470
FT-47 FT-47	9	11	720	8	4	5	12	1	155	1	157	44	22	2	1	33	3	10.75	236	1,372



APPENDIX 3: JORC Code, 2012 Edition – Table 1 Report

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	 Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralization that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralization types (e.g. submarine nodules) may warrant disclosure of detailed information. 	
Drilling techniques	Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).	 For this announcement, only Auger drilling results were reported. All drill holes have diameter of 4 ". All holes were vertical and with depths varying between 2 to 20 m, as reported in the appendix 1
Drill sample recovery	Method of recording and assessing core and chip sample recoveries and results assessed.	The auger drilling recovery conference consisted of verifying the weight of the sample against an expected mass obtained by the multiplication of the rod diameter x expected density.
	Measures taken to maximize sample recovery and ensure representative nature of the samples.	 Strict control on the services providers was maintained by the Resouro field team, made by two geologists and four technicians.
	 Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	It was not observed any relationship between recovery and grade
Logging	 Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. 	 Geotechnical descriptions were not carried out. The author considers that the level of detail of geological description for the auger drillhole is sufficient for the reporting of Exploration Results.
	 Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography. 	 Lithological logging is qualitative in nature. Geological description consisted of defining weathering levels, mineralogical, lithological, in all holes with a detail of one meter.



Criteria	JORC Code explanation	Commentary
	The total length and percentage of the relevant intersections logged.	All drillholes described in this announcement were fully logged.
Sub-sampling techniques and sample preparation	 If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field. duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	 The auger sample is dried, split and a sample about 2 kg for every meter of drilling. The physical preparation of the drilling samples was performed at the ALS Laboratory of Vespasiano – MG. Physical preparation involves crushing ~75% of the material to 3mm followed by pulverizing 95% of the material to <150#, generating a pulp weighing 250g. Sample sizes are considered appropriate for the mineralization type.
Quality of assay data and laboratory tests	The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.	 The applied assay method is considered to be the standard for the determination of TiO2 and REE. Chemical analyses were conducted in the laboratory of ALS - Vespasiano-MG. Sample pulps were assayed by ICP-MS, ICP-OES methods. X-ray The assay technique is considered to be a total rock geochemical analysis method and a standard technique within the industry.
	 For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. 	 A Susceptibilimeter, KT-10, is used to speed up the distinction between waste and mineralization. The latter has much higher magnetism than the waste rock.
	Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.	 1 field duplicates, 3 standards and 2 blanks were inserted for every 50 samples to control the quality of the physical preparation. Acceptable levels of accuracy were observed.
Verification of sampling and assaying	The verification of significant intersections by either independent or alternative company personnel.	The field team monitors QAQC data through graphs and tables.
	The use of twinned holes.	 No twin holes were used in the present batch of results being reported.
	 Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. 	Data collection and verification and storage protocols are fully documented.
	Discuss any adjustment to assay data.	Results below detection level were attributed a value of half of the detection limit.
Location of data points	 Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. 	 All drillhole collars were topographically surveyed by Stationary GPS measurements, using the system RTK.



Criteria	JC	ORC Code explanation	Co	mmentary
	•	Specification of the grid system used.	•	WGS 84 Datum for coordinate system.
	•	Quality and adequacy of topographic control.		
Data spacing and distribution	•	Data spacing for reporting of Exploration Results.	•	Auger drill grid has an average of 250 m separation.
	•	Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.		
	•	Whether sample compositing has been applied.	•	Not Applied
Orientation of data in relation to geological structure	•	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.	•	The geological layers are approximately horizontal and the holes are vertical. Sampling was performed almost perpendicular to the layers, which is the best condition.
	•	If the relationship between the drilling orientation and the orientation of key mineralized structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	•	No bias was introduced when using vertical drillholes.
Sample security	•	The measures taken to ensure sample security.	•	Samples receive in the field an identification on the sample bag containing the hole number and depth. Later in the core storage facility, each sample receives a sample number identification, both on the outside of the bag and internally with a label. The aliquots sent to the laboratory are also properly identified, internally and externally, with the sample number. All samples handling and transportation is done by own personnel.
Audits or reviews	٠	The results of any audits or reviews of sampling techniques and data.	•	At Sedar and at the Resouro website there are two NI 43.101 reports, prepared by GE21 and Atticus Geoscience, with audits and reviews of sampling data.



Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary			
Mineral tenement and land tenure status	 Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, 	1- Tiros Mir 2- Other title documer	nerais Estra e holders (I nts to TMEL	eral titles listed in the table below through: atégicos Mineração Ltda (TMEL), a compar RBM Consultoria Mineral Ltda, Rodrigo de -, which were duly lodged at ANM as signed a contract with Resouro to transfe	Brito Mello) have signed the total transfer
	wilderness or national park and environmental	Tenement	AREA Ha	Title Holder	Situation
	settings.	830026/2021	1,999	Rodrigo de Brito Mello	Extension granted - Permit valid to 29/01/2028
		830027/2021	1,987	Tiros Minerais Estratégicos Mineração Ltda	Exploration permit valid to 12/01/2027 (renewal possible
		830450/2017	872	Tiros Minerais Estratégicos Mineração Ltda	Exploration permit valid to 07/11/2026 (renewal not po
		830915/2018	1,055	Tiros Minerais Estratégicos Mineração Ltda	Exploration report presented - Term extension requeste
		831045/2010	1,736	Tiros Minerais Estratégicos Mineração Ltda	Mining plan presented - Awaiting appreciation
		831237/2021	1,855	Tiros Minerais Estratégicos Mineração Ltda	Extension granted - Permit valid to 23/01/2028
		831314/2021	1,972	Tiros Minerais Estratégicos Mineração Ltda	Exploration report presented - Term extension requeste
		831390/2020	1,995	Tiros Minerais Estratégicos Mineração Ltda	Exploration report presented - Term extension requeste
		831720/2020	1,981	Tiros Minerais Estratégicos Mineração Ltda	Exploration report presented - Term extension requeste
		832023/2023	2,000	Rodrigo de Brito Mello	Exploration permit valid to 28/9/2026 (renewal possible
		832025/2023	1,999	RBM Consultoria Mineral	Exploration permit valid to 28/9/2026 (renewal possible
		832026/2023	1,984	Tiros Minerais Estratégicos Mineração Ltda	Exploration permit valid to 28/9/2026 (renewal possible
		832027/2023	2,000	Tiros Minerais Estratégicos Mineração Ltda	Exploration permit valid to 26/9/2026(renewal possible)
		832029/2023	1,979	Tiros Minerais Estratégicos Mineração Ltda	Exploration permit valid to 28/9/2026 (renewal possible
		832223/2023	1,988	Tiros Minerais Estratégicos Mineração Ltda	Exploration permit valid to 22/11/2026 (renewal possible
		832226/2023	2,000	Tiros Minerais Estratégicos Mineração Ltda	Exploration permit valid to 22/11/2026 (renewal possible
		832601/2023	1,996	Rodrigo de Brito Mello	Exploration permit valid to 29/12/2026 (renewal possib
		832604/2023	2,000	Tiros Minerais Estratégicos Mineração Ltda	Exploration permit valid to 29/12/2026 (renewal possib
		832620/2023	1,990	Tiros Minerais Estratégicos Mineração Ltda	Exploration permit valid to 12/01/2027 (renewal possib
		832621/2023	1,998	Tiros Minerais Estratégicos Mineração Ltda	Exploration permit valid to 12/01/2027 (renewal possib
		832624/2023	1,999	Tiros Minerais Estratégicos Mineração Ltda	Exploration permit valid to 12/01/2027 (renewal possib
		832625/2023	1,998	Tiros Minerais Estratégicos Mineração Ltda	Exploration permit valid to 12/01/2027 (renewal possible
		832627/2023	1,989	Tiros Minerais Estratégicos Mineração Ltda	Exploration permit valid to 12/01/2027 (renewal possib
		833082/2014	1,251	Tiros Minerais Estratégicos Mineração Ltda	Positive Report aproved - Mining plan due 26/6/2025
		833083/2014	366	Tiros Minerais Estratégicos Mineração Ltda	Positive Report aproved - Mining plan due 26/6/2025
		831755/2020	1,988	Nexon (Marcelo Martins)	Exploration report presented - Term extension requeste
		831756/2020	1,965	Nexon (Marcelo Martins)	Exploration report presented - Term extension requeste
		831762/2020	821	Nexon (Marcelo Martins)	Exploration report presented - Term extension requeste
	The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area.	of tenement are	eas at the t		GMINE (anm.gov.br) was checked to verify the status e areas as regular for exploration works by Resouro.



Criteria	JO	ORC Code explanation	Commentary
Exploration done by other parties	•	Acknowledgment and appraisal of exploration by other parties.	Not applicable to this announcement. All holes were drilled by Resouro
Geology	•	Deposit type, geological setting and style of mineralization.	 Rare earth and titanium mineralization are hosted in sandstones and conglomerates of the Capacete Formation, belonging to the Mata da Corda Group. Titanium is associated with the mineral anatase, originating from the alteration of peroviskite. As for rare earths, they are suspected to be associated with ionic clays. The Capacete Formation is the result of the sedimentation of the erosion product of the rocks of the Patos Formation, also belonging to the Mata da Corda Group. The Patos Formation represents a voluminous set of Upper Cretaceous kamafugite pyroclastic flows and deposits, hosted in the Brasília Belt, southwest of the São Francisco Craton.
Drill hole Information	•	A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: • easting and northing of the drill hole collar • elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar • dip and azimuth of the hole • down hole length and interception depth. • hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	This press release refers to the results of the drill holes listed in the Appendix 1.
Data aggregation methods	•	In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.	 To divulgate notable intervals, a cutoff of 6% TiO2 and 1,000 ppm TREO is used. High grade intervals were defined using the cutoff of 16% TiO₂ and/or 6.000 ppm TREO. No other aggregation method is used.
	•	Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated.	 Low grade results are avoided on the reporting of notable intervals. No metal equivalent was reported.
Relationship between mineralization	•	These relationships are particularly important in the reporting of Exploration Results.	



Criteria	JORC Code explanation	Commentary
widths and intercept lengths		
	 If the geometry of the mineralization with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known'). 	All holes were vertical and the mineralization zone is horizontal.
Diagrams	 Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	Not applicable
Balanced reporting	 Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	 All results from the laboratory available for the holes being reported, for the elements Rare Earth and TiO2 are listed in the Appendix 2
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	 Test work through nitric acid digest process has demonstrated effective recovery of Rare Earth mineralisation, as previously announced by Resouro.
Further work	 The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	 A new Auger drill campaign is progressing at the moment, covering areas of low overburden. Infill results will be used to update the mineral resource model. Scoping studies, including engineering and environmental data, will be developed in the following months.